



Datasheet


Stock No:1707016


RS Pro BNC STRAIGHT PCB MOUNT JACK RECEPTACLE

NO	DESCRIPTION	DATE
A	13-22-44/R13-022-44-0026220AE → 40130208300019	02.02.18'



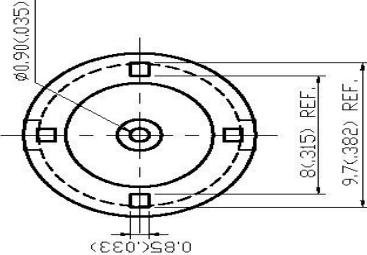

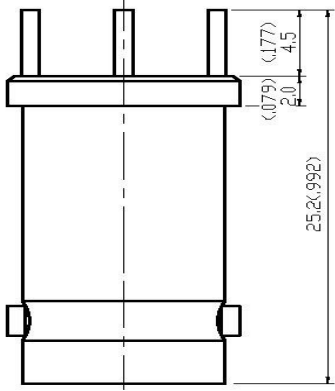



(4) $\phi 1.4$(0.055)$ MIN.
(1) $\phi 1.1$(0.043)$ MIN.
MOUNTING HOLE$$

APPROVED

by _____

DATE: _____

DESCRIPTION	BNC STRAIGHT PCB MOUNT JACK RECEPTACLE		
DRAWN	TOLERANCE	品名	DATE
<i>Jackie</i>	± 0.2	40130208300019	04.29.16
CHECK	± 0.1	TITLE	REV.
<i>A7C</i>	± 0.05	ROHS COMPLIANT (750)	A-1
APPROVAL	ANGLE	UNIT	DWG. NO.
<i>Jenny</i>	$\pm 5^\circ$	mm(in)	13-0693-Z
		SCALE	
		例	4:1

NO	DESCRIPTION	QTY
5	INSULATION	1
4	CENTER CONTACT	1
3	INSULATION	1
2	WASHER	1
1	BODY	1
	MATERIAL	FINISH
	TEFLON	NONE
	BERYLLIUM COPPER	GOLD 3μ MIN.
	TEFLON	NONE
	BRASS	NICKEL
	BRASS	NICKEL 100 μ MIN.

1.0 ELECTRICAL

1.1 FREQUENCY RANGE: DC-6 GHz
 1.2 NOMINAL IMPEDANCE: 75 OHMS
 1.3 VOLTAGE RATING: 500 VOLTS MAX.
 1.4 TSWR: 1.3 MAX.

2.0 MATERIALS

2.1 BODIES: BRASS PER JIS-C3604
 2.2 CENTER CONTACT: BERYLLIUM COPPER PER ASTM B198 UNS C17300
 2.3 INSULATION: TEFLON PER ASTM D1487 AND ASTM D1710

3.0 FINISHES AND OTHERS

3.1 SEE BELOW TABLE FOR DETAILS.

4.0 MECHANICAL

4.1 INTERFACE IN ACCORDANCE WITH: MIL-STD-3498

5.0 ENVIRONMENTAL

5.1 OPERATING TEMPERATURE RANGE: -65° C TO +165° C