

Features

- Low profile VGA connectors
- Secure connection using metal thumb screws
- Ideal for use in high visible areas or racks with limited space
- Can be used for video signal connection of PC/Laptops, projectors, display screens

RS PRO VGA Cables

RS Stock No.: 182-8889



RS PRO Professionally Approved Products bring to you professional quality parts across all product categories. Our product range has been tested by engineers and provides a comparable quality to the leading brands without paying a premium price.

Product Description

Our RS PRO 5 metre monitor cable comes with a low profile high density 15 pin male to a low profile high density 15 pin female connector which is commonly known as a VGA or SVGA connector. It has all pins connected. The jacket and the connector hoods are made of blue, low smoke zero halogen PVC.


The SVGA connector is one of the most common video connectors found on computers. SVGA is an analogue signal which is slowly being replaced by digital cables such as HDMI and Display port.

General Specifications

Connector 1	VGA
Connector 2	SVGA
Connector 1 Gender	Male
Connector 2 Gender	Female

Mechanical Specifications

Length	5m
--------	----

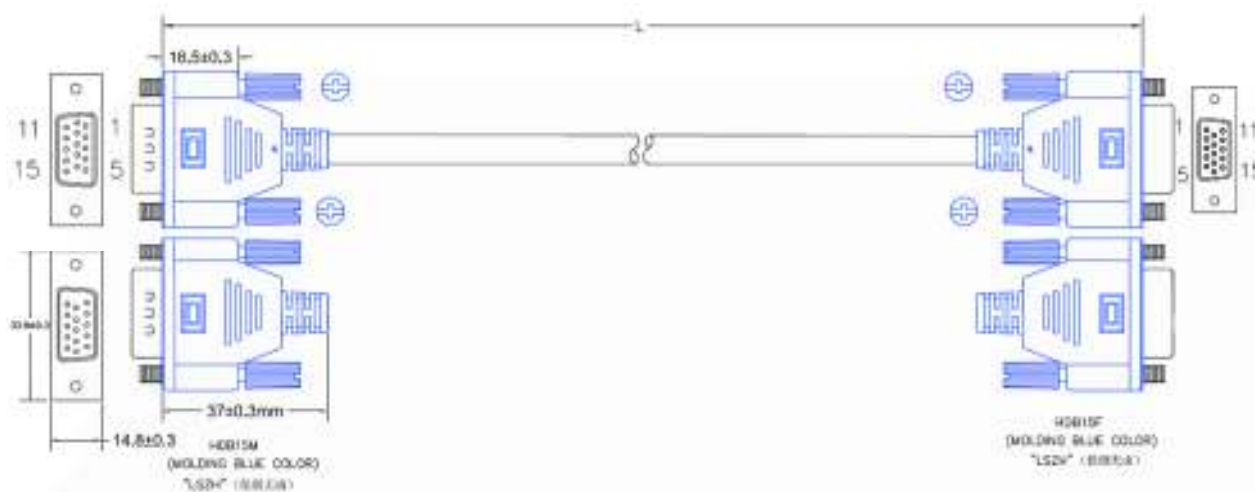

(P1)HDB15M	1	2	3	6+7+8	4	5	9	10	11	12	13	14	15	64
(P2)HDB15F	1	2	3	6+7+8	4	5	9	10	11	12	13	14	15	64
	RC	GC	BC	RG	GG	BG								

- CABLE: 32AWG,UL20276,AL-FOIL,3COAX+9C,BLUE COLOR,OD=5.5mm,LSZH JACKET(LSZH).
- LENGTH:L.
- CONNECTORS:HDB15M*1PCS,HDB15F*1PCS(BLUE INSULATOR)*1PCS(SHELL NICKEL).
- MOLD: MOLDING TYPE.
- CONTACTS
- OPEN/SHORT TEST: 100% TEST.
 - 100% OPEN,SHORT&INTERMITANCE TEST.
 - CONDUCTOR RESISTANCE: 3ohms MAX:
 - INSULATION RESISTANCE: 5M Min/,DC300V 10ms:
- ALL MUST BE MEET ON ROHS COMPLIANT.

RoHS / REACH / CE