

## FEATURES

- Using oxygen recombination technology
- PbCaSn alloy for plate grids-less gassing, less self-discharging
- High-quality AGM separator
- High purity raw material
- Silver-coated copper terminals (T1, T2 terminal)
- ABS material

# RS PRO Lead Acid Battery 6V, 1.2Ah

RS Stock No.: 727-0388



RS Professionally Approved Products bring to you professional quality parts across all product categories. Our product range has been tested by engineers and provides a comparable quality to the leading brands without paying a premium price.

## Product Description

RS PRO Lead acid batteries are suitable for use across a number of industries as well as for general purpose. They are sealed and have many uses, and are ideal for standby & float applications. These batteries are long life rechargeable batteries.

[727-0382](#) - 6V, 7Ah  
[727-0385](#) - 6V, 3.2Ah  
[727-0388](#) - 6V, 1.2Ah  
[727-0391](#) - 12V, 20Ah  
[727-0394](#) - 12V, 35Ah  
[727-0398](#) - 12V, 100Ah  
[727-0401](#) - 12V, 120Ah  
[727-0408](#) - 12V, 55Ah

## General Specifications

<b>Technology</b>	AGM
<b>Designed for Cyclic Application</b>	No
<b>Eurobat Classification</b>	3 to 5 Years,
<b>Container Material</b>	A.B.S. (UL94-HB) conform
<b>Application</b>	Standby & Float applications

### Electrical Specifications

<b>Capacity</b>	1.2Ah
<b>Nominal Voltage</b>	6V
<b>Terminal Type</b>	T1
<b>Cells Per Unit</b>	6V
<b>Voltage Per Unit</b>	12V
<b>Max. Discharge Current</b>	18A (5 sec)
<b>Max. Charging Current Limit</b>	0.3A
<b>Float charging Voltage</b>	13.5VDC to 13.8VDC/unit Average at 25°C
<b>Internal Resistance</b>	65mOhm
<b>Equalization and Cycle Service</b>	14.4VDC to 15.0VDC/unit Average at 25°C
<b>Self-Discharge</b>	The batteries can be stored for more than 6 months at 25°C. Self-discharge ratio less than 3% per month at 25°C. Please charge batteries before using..

### Mechanical Specifications

<b>Dimensions</b>	97mm x 24mm x 51.5mm
<b>Height</b>	97mm
<b>Length</b>	24mm
<b>Width</b>	51.5mm
<b>Weight</b>	290g

### Operation Environment Specifications

<b>Operating Temperature Range</b>	Discharge : -15°C to 50°C Charge : 0°C to 40°C Storage : -15°C to 40°C
<b>Nominal Operating Temperature Range</b>	25 ±3°C (77 ±5°F )

### Approvals

<b>Compliance/Certifications</b>	UL94-HB
----------------------------------	---------




**Constant Current Discharge Characteristics : A (25°C)** **Amps**

F.V/Time	5min	10min	15min	20min	30min	45min	1h	2h	3h	4h	5h	6h	8h	10h	20h
1.85V/cell	2.30	1.61	1.32	1.15	0.922	0.709	0.580	0.354	0.270	0.222	0.188	0.163	0.130	0.108	0.059
1.80V/cell	2.83	1.92	1.54	1.30	1.02	0.773	0.624	0.376	0.284	0.233	0.196	0.170	0.134	0.112	0.060
1.75V/cell	3.36	2.17	1.69	1.41	1.09	0.821	0.656	0.392	0.294	0.240	0.202	0.174	0.138	0.114	0.061
1.70V/cell	3.81	2.39	1.83	1.52	1.14	0.853	0.684	0.409	0.303	0.246	0.207	0.179	0.140	0.116	0.062
1.65V/cell	4.20	2.57	1.94	1.59	1.19	0.886	0.713	0.421	0.311	0.251	0.211	0.182	0.142	0.117	0.063
1.60V/cell	4.41	2.68	2.02	1.65	1.23	0.906	0.728	0.434	0.318	0.258	0.216	0.186	0.145	0.119	0.063


**Constant Power Discharge Characteristics : W (25°C)** **Watts**

F.V/Time	5min	10min	15min	20min	30min	45min	1h	2h	3h	4h	5h	6h	8h	10h	20h
1.85V/cell	4.35	3.06	2.55	2.23	1.80	1.39	1.14	0.701	0.536	0.442	0.377	0.327	0.261	0.217	0.120
1.80V/cell	5.28	3.61	2.93	2.50	1.98	1.51	1.22	0.741	0.560	0.462	0.390	0.339	0.269	0.224	0.121
1.75V/cell	6.18	4.05	3.20	2.70	2.10	1.59	1.28	0.768	0.577	0.474	0.399	0.345	0.274	0.226	0.121
1.70V/cell	6.93	4.42	3.43	2.88	2.19	1.64	1.33	0.796	0.592	0.483	0.406	0.352	0.277	0.229	0.122
1.65V/cell	7.54	4.69	3.59	2.99	2.26	1.70	1.37	0.814	0.604	0.490	0.413	0.357	0.280	0.231	0.124
1.60V/cell	7.79	4.82	3.70	3.05	2.30	1.72	1.39	0.834	0.615	0.499	0.419	0.362	0.284	0.234	0.124


## Dimensions

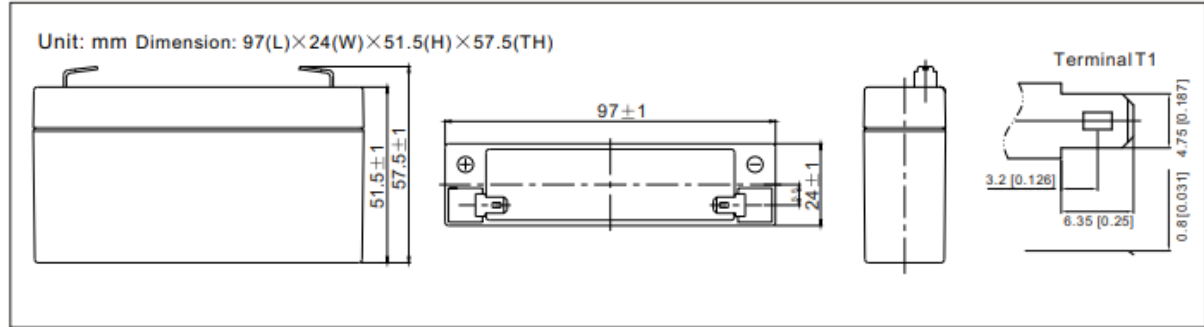

## Effect of Temperature on Long Term Float Life

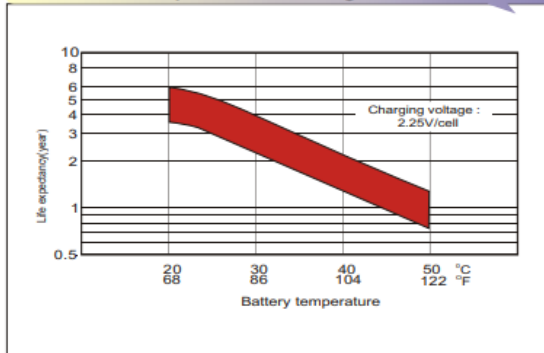


## Self Discharge Characteristics

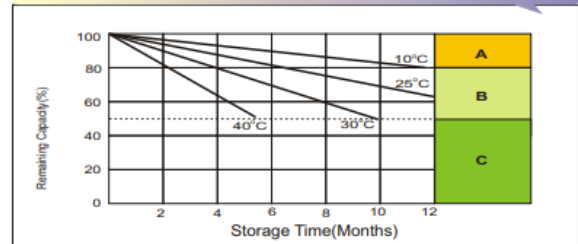


- A** No supplementary charge required  
(Carry out supplementary charge before use if 100% capacity is required.)
- B** Supplementary charge required before use. Optional charging way as below:  
1. Charged for above 3 days at limited current 0.25CA and constant voltage 2.25V/cell.  
2. Charged for above 20 hours at limited current 0.25CA and constant voltage 2.45V/cell.  
3. Charged for 8-10 hours at limited current 0.05CA.
- C** Avoid this storage period unless regular Top charge.  
Supplementary charge may often fail to recover the full capacity

## Float Charging Characteristics

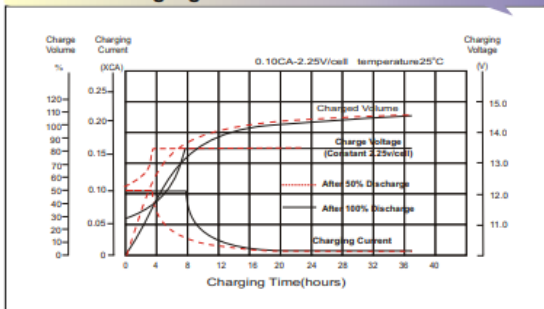

## Discharge Characteristics

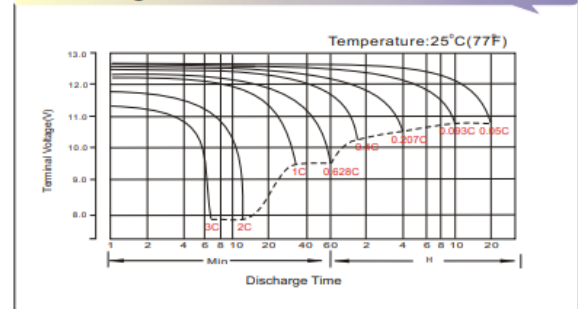

## Available Capacity Subject to Temperature

Battery Type		-20°C	-10°C	0°C	5°C	10°C	20°C	25°C	30°C	40°C	45°C
AGM Battery	6V&12V	46%	66%	76%	83%	90%	98%	100%	103%	107%	109%

## Discharge Current VS. Discharge Voltage

Final Discharge Voltage V/cell	1.80V	1.75V	1.60V
Discharge Current (A)	$(A) \leq 0.2C$	$0.2C < (A) < 1.0C$	$(A) \geq 1.0C$

**Charge the batteries at least once every six months, if they are stored at 25°C.**

### Charging Method:

Constant Voltage	-0.2Cx2h+2.4~2.45V/Cellx24h,Max. Current 0.3CA
Constant Current	0.1C until the voltage reaching 7.2V,then 0.1Cx4h