

Datasheet

RS PRO VINYL-FULLY INSULATED (MOLDED EASY ENTRY) DOUBLE CRIMP FEMALE DISCONNECTORS

Stock number: **2055285**

MAXIMUM ELECTRIC CURRENT:

A.W.G.	16	14
AMP.	10	15

MAXIMUM ELECTRICAL RATING: 105° C 600 VOLTS MAX.

INSULATION MATERIAL: VINYL


TERMINAL MATERIAL: BRASS

DOUBLE CRIMP: WITH COPPER SLEEVE ON BARREL

TERMINAL/SLEEVE SURFACE TREATMENT: TIN PLATED

INSULATION COLOR: BLUE

TERMINAL BARREL I.D.: C=2.3MM

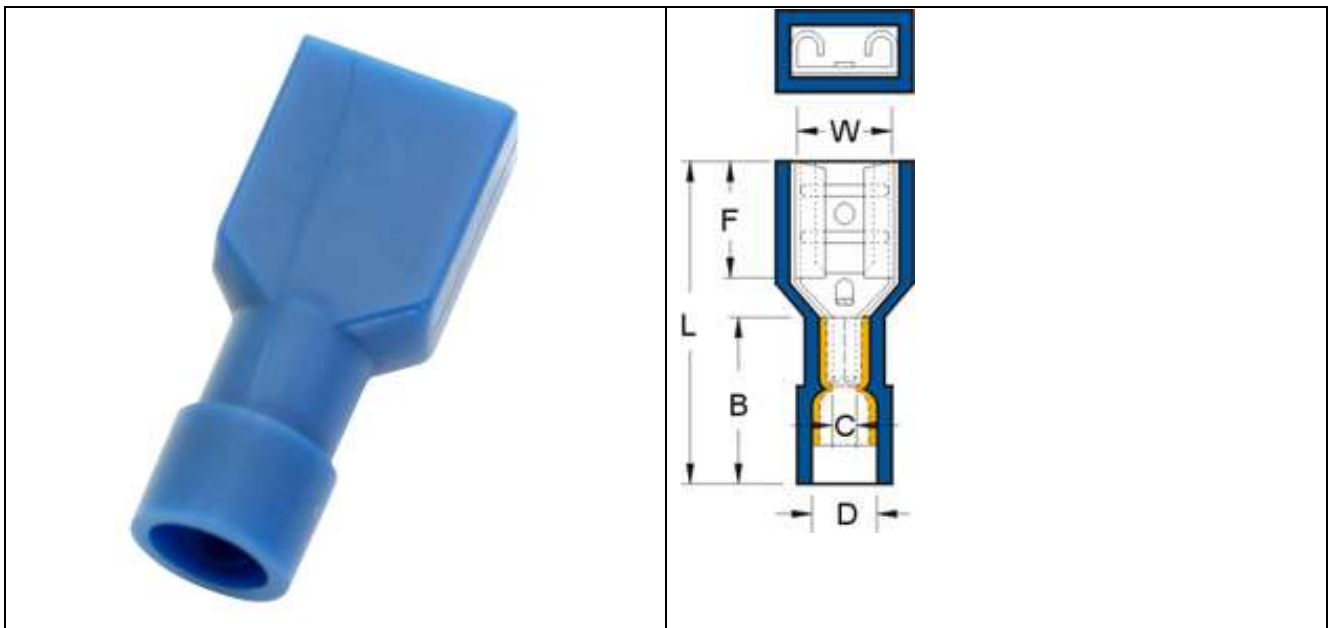

WIRE RANGE A.W.G. mm ²	NEMA TAB	DIMENSION inch(mm)					
		W	F	L	B	D	T
16-14 A.W.G. 1.5-2.5 mm ²	.032X.250 (0.8X6.35)	0.26 6.6	0.295 7.5	0.846 21.5	0.433 11	0.197 5.000	0.016 0.4

