


Runtime: SMX3000RMHV2UNC

APC Smart-UPS X, Line Interactive, 3kVA, Rack/tower convertible 2U, 208V-230V, 8x C13+1x C19 IEC, Network card, Extended runtime

Smart-UPS

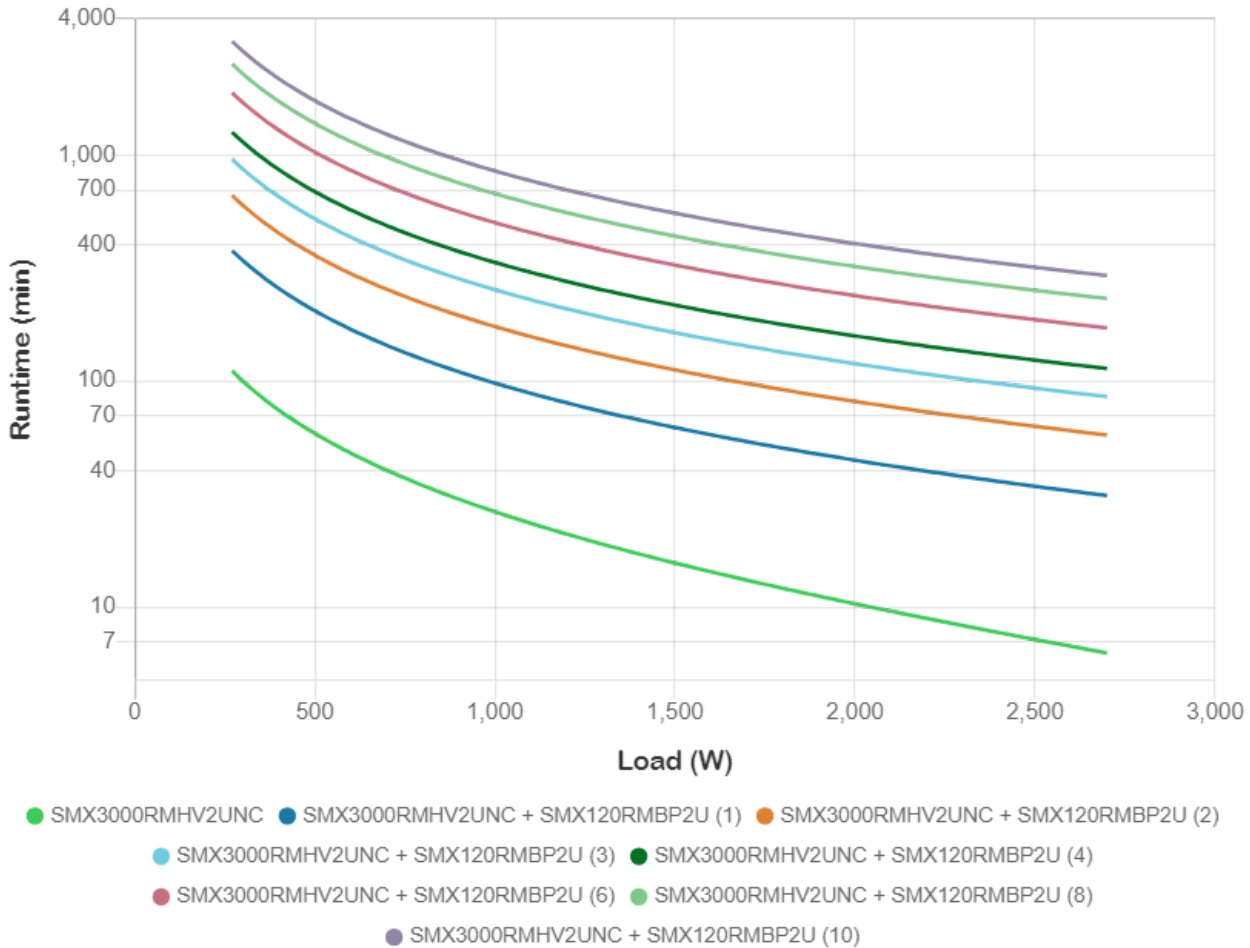

Curve fit to measured runtime data. All measurements taken with new, fully charged batteries, at typical environmental conditions, with no electrical input and balanced resistive load (PF = 1.0) output.

Load / Runtime	270 W	500 W	1,000 W	1,500 W	2,000 W	2,500 W	2,700 W
SMX3000RMHV2UNC	1 h 50 min	58 min	26 min 25 sec	15 min 40 sec	10 min 20 sec	7 min 11 sec	6 min 15 sec
1x SMX3000RMHV2UNC	6 h 17 min	3 h 24 min	1 h 37 min	1 h 2 min	44 min	34 min	31 min
1x SMX120RMBP2U							
1x SMX3000RMHV2UNC	11 h 2 min	6 h	2 h 54 min	1 h 52 min	1 h 21 min	1 h 3 min	57 min
2x SMX120RMBP2U							
1x SMX3000RMHV2UNC	15 h 58 min	8 h 41 min	4 h 13 min	2 h 43 min	1 h 59 min	1 h 33 min	1 h 25 min
3x SMX120RMBP2U							
1x SMX3000RMHV2UNC	21 h 1 min	11 h 27 min	5 h 34 min	3 h 36 min	2 h 38 min	2 h 3 min	1 h 53 min
4x SMX120RMBP2U							
1x SMX3000RMHV2UNC	31 h 25 min	17 h 9 min	8 h 21 min	5 h 25 min	3 h 58 min	3 h 6 min	2 h 51 min
6x SMX120RMBP2U							
1x SMX3000RMHV2UNC	42 h 7 min	23 h	11 h 14 min	7 h 17 min	5 h 21 min	4 h 12 min	3 h 51 min
8x SMX120RMBP2U							
1x SMX3000RMHV2UNC	53 h 3 min	28 h 59 min	14 h 9 min	9 h 12 min	6 h 45 min	5 h 18 min	4 h 52 min
10x SMX120RMBP2U							

<https://www.apc.com/us/en/products-runtime-graph/SMX3000RMHV2UNC/apc-smartups-x-line-interactive-3kva-rack-tower-convertible-2u-208v230v-8x-c13+1x-c19-iec-network-card-extended-runtime>