


Datasheet

Snap on Screw Earth Terminal

RS Stock number 872-4704

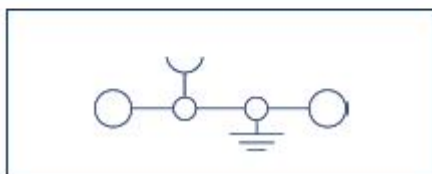

Protective earth terminal
2 connections

Specifications

Rated cross-section, mm² | AWG: 35 | 16-1/0

Rated impulse voltage, kV | Contamination degree: 8 | 3

Plug gauge acc. to EN 60 947-1 | Flamm. class acc. to UL 94: B9 | V 0

Connection data

Single wire (solid) | stranded, mm²: 1.5-50 |

Finely-stranded | finely-stranded: 1.5-50 | 1.5-35

(w/ferrules DIN 46 228/1), mm²

Clamping area, mm²: 1.5-50

Stripping length, mm: 18

Torque, Nm | Screw: 3.2-3.7 | Slotted M6