


Mercury E, BT bulb

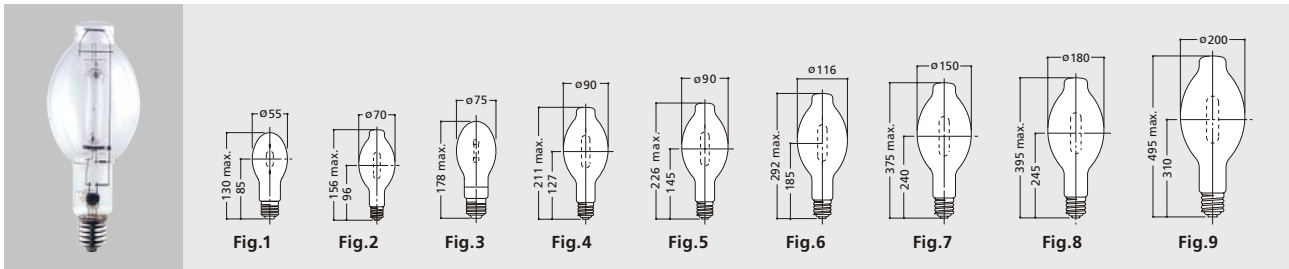

PHYSICAL DATA AND CHARACTERISTICS

Type	Watts (W)	Bulb	Base	Std. Pkg. Qty.	M.O.L. (mm)	L.C.L. (mm)	Lamp		Approx. Initial Lumens (lm)	Rated Av. Life (hrs)	Fig. No.
							Voltage (V)	Current (A)			
Coated											
HF40PD	40	E55	E27	30	130	—	90	0.53	1500	8000	1
HF50PD	50	E55	E27	30	130	—	95	0.61	1900	8000	1
HF50PD/H	50	E55	E27	30	130	—	95	0.61	1900	8000	1
HF80PD	80	E70	E27	24	156	—	115	0.80	3600	16000	2
HF80PD/H	80	E70	E27	24	156	—	115	0.80	3600	16000	2
HF100PD	100	E75	E27	24	178	—	115	1.00	4500	24000	3
HF125PD	125	E75	E27	24	178	—	125	1.15	6250	24000	3
HF125PD/H	125	E75	E27	24	178	—	125	1.15	6250	24000	3
HF175PD	175	BT90	E40	12	211	—	130	1.50	8900	24000	4
HF250PD	250	BT90	E40	12	226	—	130	2.13	13700	24000	5
HF300PD	300	BT116	E40	12	292	—	130	2.50	17000	24000	6
HF400PD	400	BT116	E40	12	292	—	135	3.25	24000	24000	6
HF700PD	700	BT150	E40	6	375	—	140	5.40	44000	24000	7
HF1000PD	1000	BT180	E40	6	395	—	145	7.50	64000	16000	8
HF1000BPD	1000	BT180	E40	6	395	—	265	4.00	64000	24000	8
HF2000BPD	2000	BT200	E40	1	495	—	270	8.00	125000	10000	9
Clear											
H40	40	E55	E27	30	130	85	90	0.53	1300	8000	1
H50	50	E55	E27	30	130	85	95	0.61	1650	8000	1
H50/H	50	E55	E27	30	130	85	95	0.61	1650	8000	1
H80	80	E70	E27	24	156	96	115	0.80	3000	16000	2
H80/H	80	E70	E27	24	156	96	115	0.80	3000	16000	2
H100	100	E75	E27	24	178	115	115	1.00	4000	24000	3
H125	125	E75	E27	24	178	115	125	1.15	5400	24000	3
H125/H	125	E75	E27	24	178	115	125	1.15	5400	24000	3
H175	175	BT90	E40	12	211	127	130	1.50	7800	24000	4
H250	250	BT90	E40	12	226	145	130	2.13	12000	24000	5
H300	300	BT116	E40	12	292	185	130	2.50	15000	24000	6
H400	400	BT116	E40	12	292	185	135	3.25	21000	24000	6
H700	700	BT150	E40	6	375	240	140	5.40	39500	24000	7
H1000	1000	BT180	E40	6	395	245	145	7.50	58000	16000	8
H1000B	1000	BT180	E40	6	395	245	265	4.00	58000	24000	8
H2000B	2000	BT200	E40	1	495	310	270	8.00	120000	10000	9

Elliptical bulb from 250W to 1000W is available upon request.

Mercury lamp, long reliable lamp life.

Features

- Long reliable lamp life by superior quality and technology.
- Coated: Ra 40, CCT=4100K
- Clear: Ra 25, CCT=5700K

Notes:

Warning / Caution notices: page 54