


Datasheet

RS Pro ASL RB65 Washdown Gun

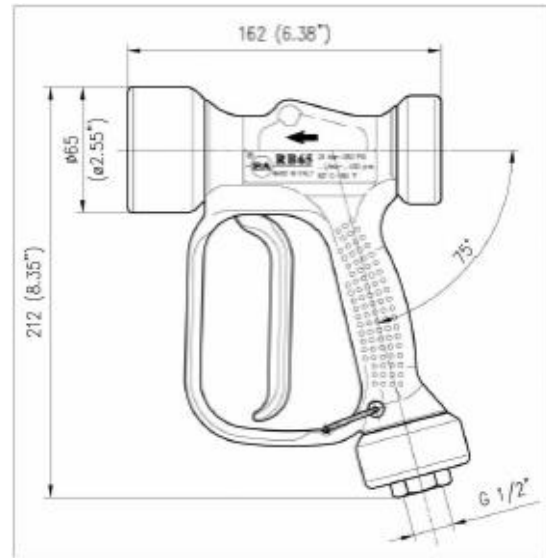

Specifications:

- Shock proof, low-pressure gun with conical/pencil jet controlled by trigger
- Guns Suitable for use up to 24 bar, 2.4 MPa rated pressure pumps
- Adjustable screw to vary cone width from 0° to 60°
- Covered by semi-housings of non-stainable shockproof plastic, entirely sealed and with 3 rubber protective rings
- Minimum fatigue for trigger opening and use
- Internal structure in Brass and Stainless Steel

Features:

- Ergonomic construction
- Inlet swivel connection
- Plastic trigger protected by hand guard
- The gun has been designed for continuous use, at a water temperature of 60°C (195°F) for short periods only
- Safety wear should be used when operating the gun at a water temperature higher than 60°, such as gloves, glasses etc.