


Datasheet

**RS Pro Uninsulated Crimp Ring Terminal, 4 mm, #8 Stud Size, 4mm<sup>2</sup> to 6mm<sup>2</sup>, 12AWG to 10AWG**

RS Stock No: **510-4949**

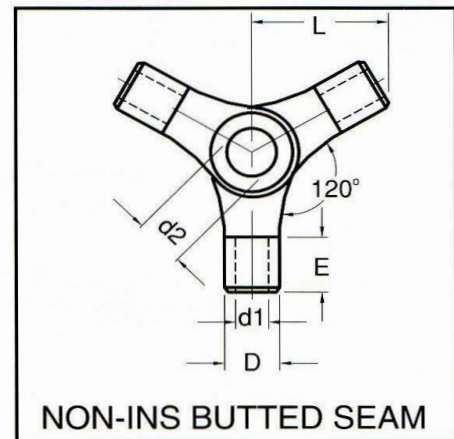

**Features and Benefits**

- 3- and 4-way disconnects
- Multi-way crimping
- Accommodates wire size of 12 to 10 AWG

**Specifications:**

Contact Material	Copper
Inner Ring Diameter	3.4 mm
Insulation	Uninsulated
Maximum Wire Size (AWG)	10 AWG
Maximum Wire Size (mm <sup>2</sup> )	6 mm <sup>2</sup>
Minimum Wire Size (AWG)	12 AWG
Minimum Wire Size (mm <sup>2</sup> )	4 mm <sup>2</sup>



ENGLISH

Outer Ring Diameter	5.6 mm
Overall Length	30 mm
Shrouded	Unshrouded
Stud Size	#8
Wire Size	12 to 10 AWG