



Surface Mount Microprocessor Crystal 3.2 x 2.5

Features

- Compact Design
- High Accuracy
- Excellent for High Density Surface Mounting



❖ Specifications

Parameter		Value
Frequency Range		8.000 to 115.000 MHz
Mode of Oscillation	Fundamental	8.000 to 55.000 MHz
	Third Overtone	25.000 to 115.000 MHz
Frequency Tolerance at 25°C		±100 ppm Standard (±10, ±20 & ±50 ppm available)
Frequency Stability over Temperature		±100 ppm Standard (±10, ±20 & ±50 ppm available)
Operating Temperature Range		-20°C to +70°C Standard -40°C to +85°C Extended
Storage Temperature Range		-40°C to +85°C
Aging		±3 ppm per Year maximum
Load Capacitance		9 pF to 32 pF or Series
Equivalent Series Resistance		See Table 1
Shunt Capacitance		5.0 pF maximum
Drive Level		100 µW Typ., 500 µW Max
Shock Resistance		±5 ppm Maximum 75 cm Drop Test in 3 axes onto a hardwood surface

Table 1

Frequency (MHz)	Mode	MAX ESR (Ohms)
8.000 to 15.999	FUND	100
16.000 to 19.999	FUND	80
20.000 to 54.999	FUND / 3OT	60 / 40
55.000 to 115.000	3OT	40

❖ Environmental


Parameter	Value
Moisture Sensitivity Level	1
RoHS	6/6 Complaint & Lead Free
REACH SVHC	Compliant
Halogen Free	Compliant
ESD Classification Level	N/A
Termination Finish	Au
Unit Weight (grams)	0.019

RS, Professionally Approved Products, gives you professional quality parts across all products categories. Our range has been testified by engineers as giving comparable quality to that of the leading brands without paying a premium price.




JA PRODUCT FAMILY

❖ Mechanical Specification

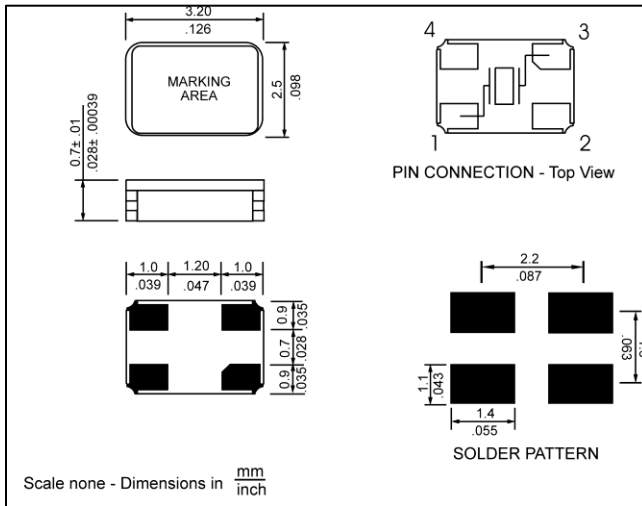

❖ Carrier Tape Dimension

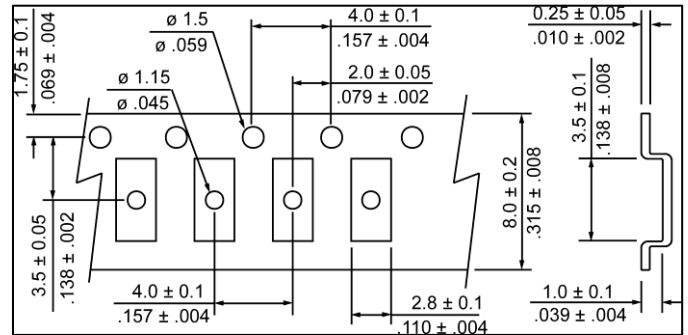

NOTE: REFER TO EIA-481 FOR DIMENSIONS

❖ Packaging

180 mm Reel Diameter
8 mm Tape Width, 4 mm Pitch
Quantity: 3000 pcs per Reel

In accordance with EIA-481

❖ Part Numbering

JA	-	24.000	-	18	-	XXXX
Product Family		Frequency (MHz)		Load Capacitance (pF)		1) Tolerance, 2) Stability, 3) Mode, 4) Temperature
				9 to 32 pF or S for Series		Tolerance: E=±10 ppm, H=±15 ppm D=±20ppm, A=±25 ppm, F=±30 ppm, B=±50 ppm, C=±100 ppm (std)
						Stability: E=±10 ppm, H=±15 ppm D=±20ppm, A=±25 ppm, F=±30 ppm, B=±50 ppm, C=±100 ppm (std)
						Mode: blank = Fundamental, 3=3 rd Overtone
						Temperature range: blank standard, E=Extended

EXAMPLE: JA-24.000-12-CC

Surface Mount Microprocessor Crystal, 3.2 x 2.5, 24.000 MHz, 18 pF load Capacitance, standard tolerance (±100 ppm) and stability (±100 ppm), Fundamental mode, standard Temperature range -20°C to +70°C


EXAMPLE: JA-8.000-10-BBE

Surface Mount Microprocessor Crystal, 3.2 x 2.5, 8.000 MHz, 10 pF load Capacitance, tolerance (±50 ppm), stability (±50 ppm), Fundamental mode, Extended Temperature range -40°C to +85°C



JA PRODUCT FAMILY

Reflow Profile

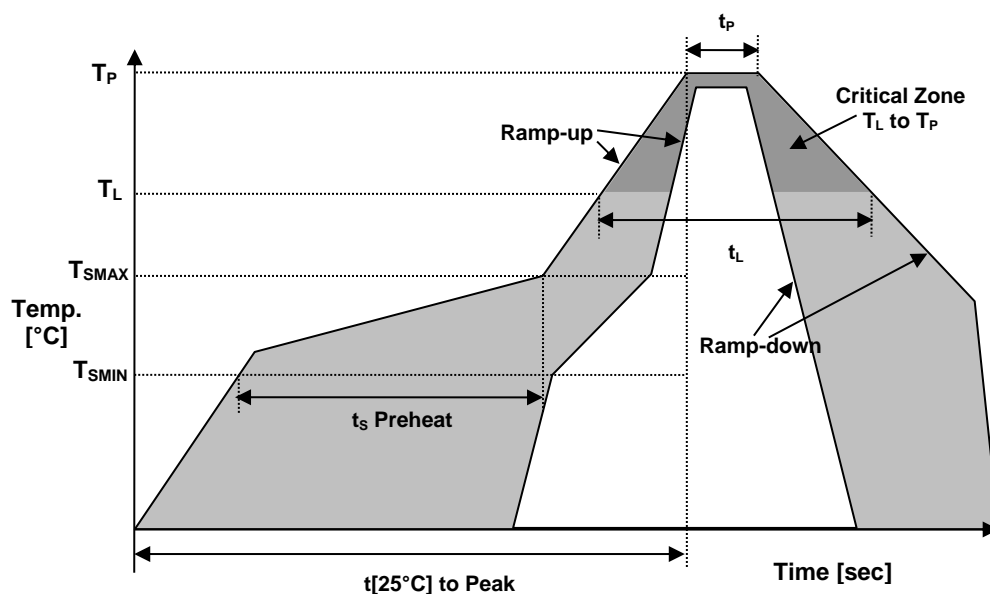

Reflow Profile (Reference IPC/JEDEC J-STD-020)		
Temperature Min Preheat	T_{SMIN}	150°C
Temperature Max Preheat	T_{SMAX}	200°C
Time (T_{SMIN} to T_{SMAX})	t_s	60 – 180 sec.
Temperature	T_L	217°C
Peak Temperature	T_P	260°C
Ramp-Up Rate	R_{UP}	3°C / sec. max
Ramp-Down Rate	R_{DOWN}	6°C / sec. max
Time within 5°C of Peak Temperature	T_P	10 sec.
Time $t[25^\circ\text{C}]$ to Peak Temperature	$t[25^\circ\text{C}]$ to Peak	480 sec.
Time	T_L	60 – 150 sec.

RS, Professionally Approved Products, gives you professional quality parts across all products categories. Our range has been testified by engineers as giving comparable quality to that of the leading brands without paying a premium price.



JA PRODUCT FAMILY

● MARKING

RFF.FF
xxLTyw

FF.FF – Frequency in MHz
 x – Internal Production ID code
 L – Load Capacitance Code
 T – Tolerance Code
 y – Year code
 w – Week code

LOAD CAPACITANCE CODE			
CODE	C _L (pF)	CODE	C _L (pF)
A	20	J	12
B	18	K	10
C	16	M	14
D	30	N	15
F	12.5	P	13
G	32	8	8
H	22	9	9

TOLERANCE CODE	
CODE	TOL (ppm)
C	±100
B	±50
F	±30
D	±20
E	±10

YEAR CODE	
Year	Code
2011	1
2012	2
2013	3
2014	4
2015	5
2016	6
2017	7
2018	8
2019	9
2020	0

ALPHA WEEK CODE					
Week	Code	Week	Code	Week	Code
1	a	19	s	37	K
2	b	20	t	38	L
3	c	21	u	39	M
4	d	22	v	40	N
5	e	23	w	41	O
6	f	24	x	42	P
7	g	25	y	43	Q
8	h	26	z	44	R
9	i	27	A	45	S
10	j	28	B	46	T
11	k	29	C	47	U
12	l	30	D	48	V
13	m	31	E	49	W
14	n	32	F	50	X
15	o	33	G	51	Y
16	p	34	H	52	Z
17	q	35	I		
18	r	36	J		

● APPROVAL

DRAWN BY	FP, 28 March 2017
APPROVED BY	FP, 28 March 2017
REVISION	A, Initial Release