

# XVMC35

Indicator bank, Harmony XVM, Illuminated unit for modular tower lights, plastic, orange, 45mm, for bulb BA 15d, 230V AC DC



## Main

Range of product	Harmony XVM
Product or component type	Indicator bank
Beacon or indicator bank unit type	Illuminated unit
Component name	XVM
Light source	Bulb not included, orange
Bulb type	Incandescent with BA 15d base Super bright LED Flash discharge tube
[Us] rated supply voltage	<= 230 V AC/DC

## Complementary

Mounting diameter	45 mm
Assembly style	Customer assembly
Maximum power dissipation in W	5 W
Connections - terminals	Screw terminals, 1 x 0.325...1 x 1.5 mm <sup>2</sup>
Marking	CE
[Ui] rated insulation voltage	250 V conforming to IEC 60947-1
Nominal voltage limit	0.85...1.1 Un conforming to IEC 60947-5-1
[Uimp] rated impulse withstand voltage	4 kV conforming to IEC 60947-1
Luminance	650 cd/m <sup>2</sup>
CAD overall width	47 mm
CAD overall height	65 mm
CAD overall depth	47 mm
Net weight	0.04 kg

## Environment

Product certifications	CCC
Standards	IEC 60947-5-1 IEC 60947-1
Ambient air temperature for storage	-25...70 °C
Ambient air temperature for operation	-10...50 °C
IP degree of protection	IP40 any position except vertical position conforming to IEC 60529 IP42 vertical position conforming to IEC 60529
Electrical shock protection class	Class I aluminium tube mounting conforming to IEC 60947-1 Class I aluminium tube mounting conforming to IEC 60947-5-1 Class I aluminium tube mounting conforming to IEC 61140 Class II base mounting conforming to IEC 60947-1 Class II base mounting conforming to IEC 60947-5-1 Class II base mounting conforming to IEC 61140
Protective treatment	TC

The information provided in this documentation contains general descriptions and/or technical characteristics of the performance of the products contained herein. This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications. It is the duty of any such user or integrator to perform the appropriate and complete risk analysis, evaluation and testing of the products with respect to the relevant specific application or use thereof. Neither Schneider Electric Industries SAS nor any of its affiliates or subsidiaries shall be responsible or liable for misuse of the information contained herein.

## Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	5.100 cm
Package 1 Width	7.200 cm
Package 1 Length	10.100 cm
Package 1 Weight	48.000 g
Unit Type of Package 2	S01
Number of Units in Package 2	25
Package 2 Height	15.000 cm
Package 2 Width	15.000 cm
Package 2 Length	40.000 cm
Package 2 Weight	1.440 kg

## Offer Sustainability

Sustainable offer status	Green Premium product
REACH Regulation	<a href="#">REACH Declaration</a>
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope)
Mercury free	Yes
China RoHS Regulation	<a href="#">China RoHS Declaration</a>
RoHS exemption information	<a href="#">Yes</a>
Environmental Disclosure	<a href="#">Product Environmental Profile</a>
Circularity Profile	No need of specific recycling operations
WEEE	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins


## Contractual warranty

Warranty	18 months
----------	-----------

Customer Assembled Tower Light

Dimensions

Below drawing shows a tower light with 3 illuminated stages. Select the number of stages according to the product characteristics in order to get b dimension.

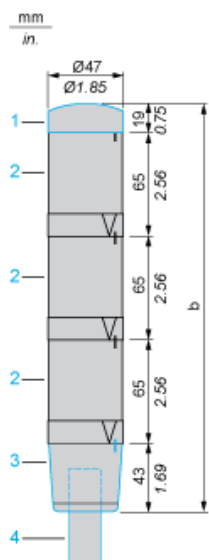

- (1) Cover (included with base unit XVMC21/C29•)
- (2) Illuminated unit
- (3) Base unit XVMC21 (without buzzer) or XVMC29• (with buzzer), to be ordered separately
- (4) Fixing base XVMZ0•/Z0•T, to be ordered separately

Number of illuminated units (ref. 2)	b in mm	b in in.
1	127	5.00
2	192	7.56
3	257	10.12
4	322	12.68
5	387	15.24