

För icke direkt toleranssatta mått gäller toleransklass
 General tolerances if not otherwise stated

NOM DIM MM		TOL CLASS		
From	To	A	B	C
(1)	6	±0.05	±0.1	±0.2
(6)	30	±0.1	±0.2	±0.5
(30)	100	±0.15	±0.3	±0.8
(100)	300	±0.2	±0.5	±1.2
(300)	1000	±0.3	±0.8	±2

Hål / Holes H13


Skarpa kanter brutna där ej annat anges.
 No sharp edges unless otherwise specified.

Övriga generella toleranser enligt ritning 4100-4644.
 Additional general tolerances in accordance with drawing 4100-4644.

Rev	Change order	Change: A = Added W = Was D = Deleted	Date	Sign
14	1067110	C 4300-3768	14.0519	SE



4100-5778

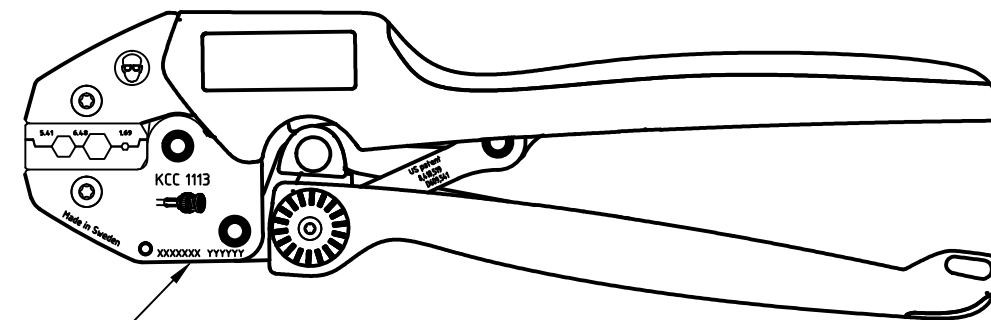

4300-3768

FÖRSPÄNNING / PRELOAD: 170 ± 20 N

Tolkmått / Gauge dimensions (mm)

URTAG NEST	Gåtolk GO	Stopptolk NO GO
5.41	∅5.36	∅5.46
6.48	∅6.43	∅6.53
1.69	∅1.66	∅1.72

Material			Behandling/Treatment				Status Fristläppt	
Konstr./Design HC	Ritad/Drawn TGW	Datum/Date 2009-11-03	Skala/Scale 1:2	Kontr./Checked IP	Godk./Approved NE	Ämne/Blank		
pressmaster ®			Benämning/Denomination KRIMPTÅNG 453-870 CRIMPING TOOL			Vikt/Weight, gram 43001355	Art grp 012	
ISO 9001 REG NR FM13687						Ritn nr/Drawing no 43001355	REV 014	