



Datasheet

Coax video cable w/BNC plugs,4x75ohm 3m

RS Stock 172-2997



Specifications

Inner Conductor: 7 x 12/100 copper (0.35mm)

Insulation: PE (1.55mm)Screen: Copper (2.00mm)Jacket: PVC (2.50mm)

• Colours: Red – Green – Blue – Black

Out Jacket: Ergonomic black PVC (7.20mm)

Weight: 12.7 g/mBend Radius: 15mm


Operating temp: -40°C a + 85°C
Nominal impedance: 75 ohms
Velocity of propagation: 65.9 %
Frequency range: DC- 4 GHz

Dielectric strength rating: 1000 veffOperating voltage: 450 veff max





Dimensions: (mm)

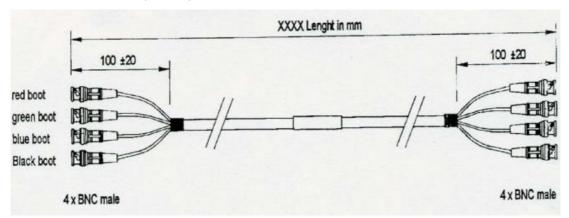

Frequency (MHz)	Attention (dB/m)	Power Rating (W)
50	0.20	100
100	0.30	80
300	0.45	45
1000	1.00	25