


## Datasheet

### Screw Feed Through Terminal

RS Stock number 872-4717

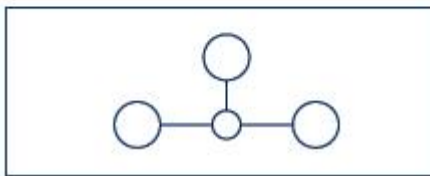

Feed-through terminal  
2 connections

## Specifications

Rated cross-section, mm<sup>2</sup> | AWG: 120 | 4-000

Rated impulse voltage, kV | Contamination degree: 8 | 3

Plug gauge acc. to EN 60 947-1 | Flamm. class acc. to UL 94: B13 | V 0

### Connection data

Single wire (solid) | stranded, mm<sup>2</sup>: 16-150 | 16-150

Finely-stranded | finely-stranded: 16-120 | 16-95

(w/ferrules DIN 46 228/1), mm<sup>2</sup>

Clamping area, mm<sup>2</sup>: 16-150

Stripping length, mm: 27

Torque, Nm | Screw: 12-20 | Hexagon socket M10