



| NO | DESCRIPTION  | DATE      |
|----|--|-----------|
| △  | ADD MIS PART NO.   | 04.01.04' |
| △  | ADD DESCRIPTION<br>ADD 6.2±0.38<br>47.04±0.13 → 47.04±0.25<br>38.38±0.13 → 38.38±0.25<br>#3.05 → #3.05±0.25<br>7.9 → 7.9±0.25<br>12.55 REF. → 12.55±0.38<br>2.77 → 2.77±0.38<br>41.3 REF. → 41.28±0.38<br>1 → 0.76±0.25<br>10.72 REF. → 10.72±0.38<br>11 REF. → 10.85±0.38<br>3.3 REF. → 2.4±0.5<br>2.84 → 2.84±0.38<br>TIN → GOLD<br>MIS PART NO. → P/N | 03.13.06' |
| △  | CORRECT DIMENSION LINE POSITION  | 12.02.11' |
| △  | GOLD   | 05.16.13' |

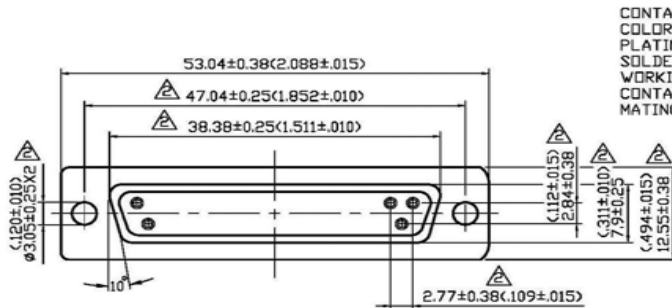

CONTACT TYPE MACHINED CONTACT  
 COLOR OF INSULATION BLACK PBT GLASSFIBRE REINFORCED  
 PLATING OF CONTACT △ GOLD  
 SOLDER TERMINATIONS △ GOLD  
 WORKING VOLTAGE 500V AC AT SEA LEVEL  
 CONTACT RESISTANCE 10m OHM MAX.  
 MATING CYCLES 150 TIMES

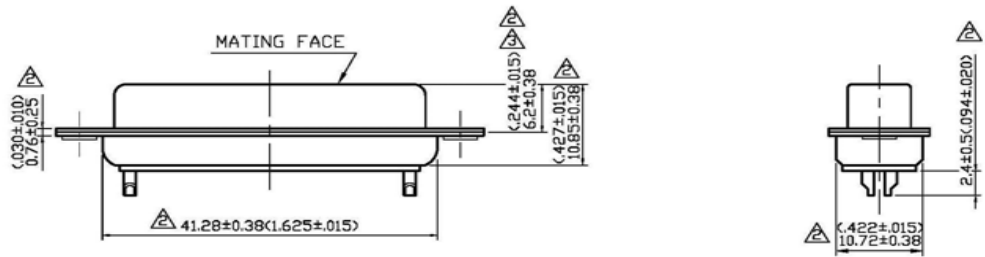

△△ P/N: 544-3834

APPROVED

by \_\_\_\_\_ DATE: \_\_\_\_\_



| DESCRIPTION |          | D-SUB WITH 25-PIN FEMALE CONNECTOR BY MACHINING |       |                 |         |           |    |      |
|-------------|----------|---|-------|-----------------|---------|-----------|----|------|
| 製圖          | DRAWN    | TOLERANCE                                       | 品名    | 050-0025S-M     | 日期      | DATE      | 版次 | REV. |
|             | Yoko     | .X ±0.2   | TITLE | \ROHS COMPLIANT |         | 02.23.95' |    | A-4  |
| 檢圖          | CHECK    | .XX ±0.1  | 單位    | UNIT            | DWG.NO. | 55-0053   |    |      |
|             | Ivan     | .XX ±0.1  |       | mm(in)          |         |           |    |      |
| 認定          | APPROVAL | .XXX ±0.05                                      | 比例    | SCALE           |         |           |    |      |
|             | Angela   | ANGLE ±5°                                       |       | 2:1             |         |           |    |      |