


Bottom bracket wrench 16 notch - 1609/2BI

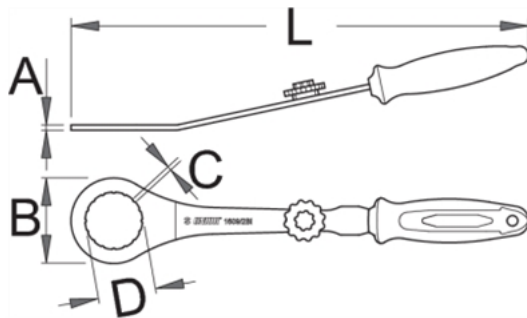

Description

- material: special tool steel, hardened and tempered
- surface finish: chrome plated according to ISO 1456:2009
- ergonomic heavy duty double component handle
-

How to use the tool:

- The wrench is used to remove and install Shimano® Hollowtech II, Campagnolo® Ultra-Torque and Power Torque, Race Face®, FSA®, SRAM®, Truvativ®, Chris King® bottom brackets as well as many and others. Small wrench is included for removal and installation of Shimano plastic bolts that are used on the Hollowtech II cranksets. The 1609/2BI wrench also fits on the external centerlock disc nut.

Technical Data

Length t	A	B	D	C					
61553 6	350	4	66	42,7	2,8	316	4B	10	-

Packaging data

	Retail tool packaging				Transport package				
	Retail packi ng in mm (width)	Retail packi ng in mm (heigh t)	Retail packi ng in mm (lengh t)			Trans port packi ng in mm (width)	Trans port packi ng in mm (heigh t)	Trans port packi ng in mm (lengh t)	
61553 6	66	40	455	345	4	377	65	109	1480