


NO	DESCRIPTION	DATE
⚠	DEL /CRIMP DEL CRIMP SIZE REQUIRED	06.25.15'

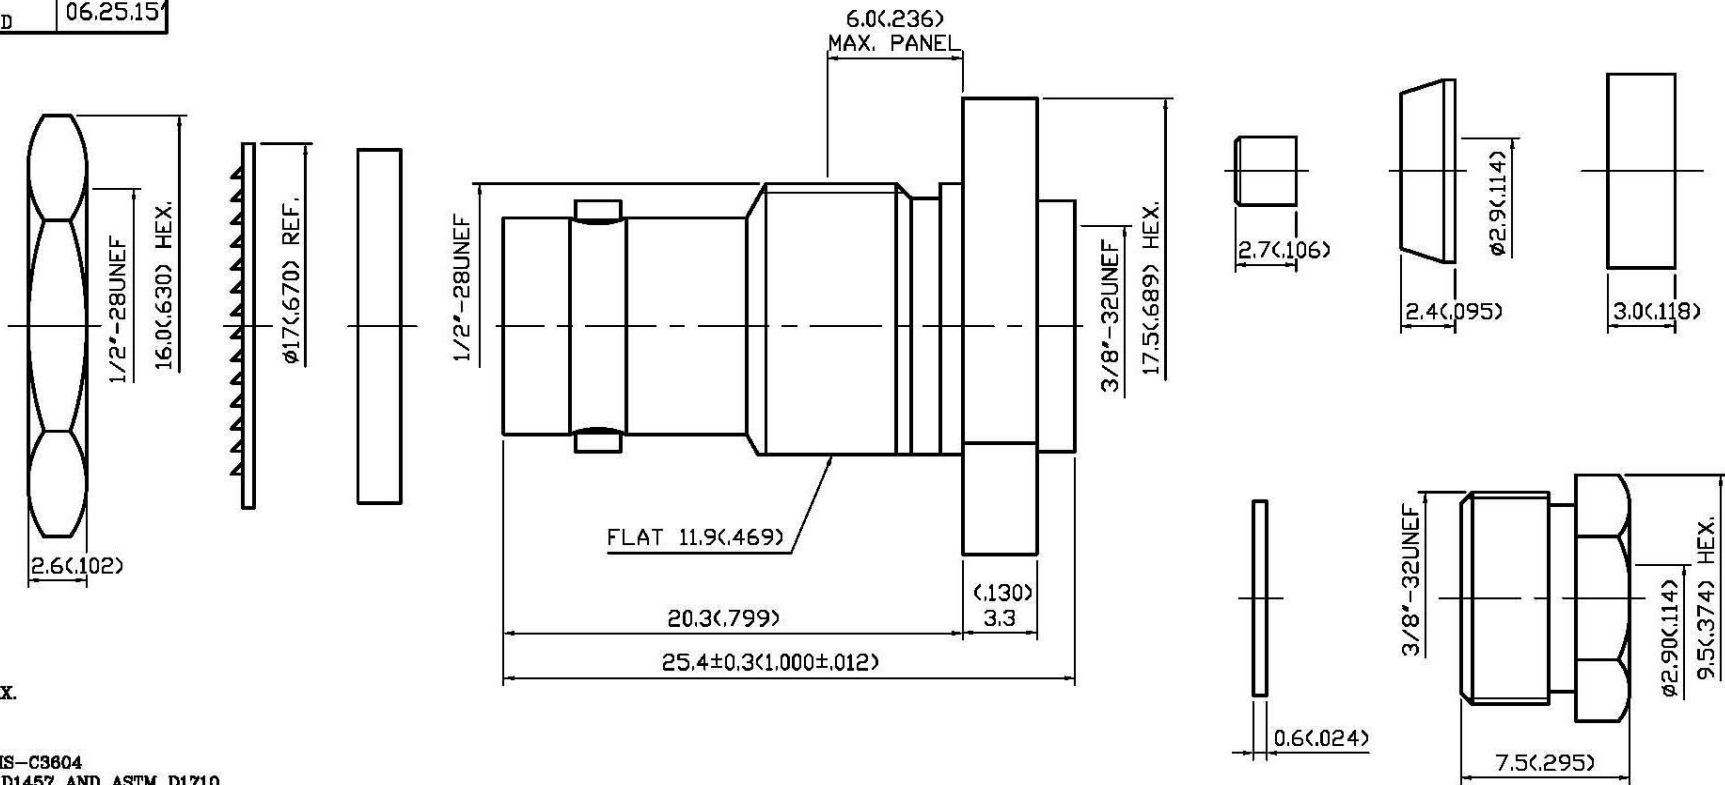

1.0 ELECTRICAL

- 1.1 FREQUENCY RANGE: DC-1 GHz
- 1.2 NOMINAL IMPEDANCE: 75 OHM
- 1.3 VOLTAGE RATING: 500 VOLTS MAX.

2.0 MATERIALS

- 2.1 BODIES: BRASS PER JIS-C3804
- 2.2 CENTER CONTACT: BRASS PER JIS-C3804
- 2.3 INSULATION: TEFLON PER ASTM D1457 AND ASTM D1710

3.0 FINISHES AND OTHERS

- 3.1 SEE BELOW TABLE FOR DETAILS.


4.0 MECHANICAL

- 4.1 FOR USE WITH RG179U OR SIMILAR STYLE CABLE
- 4.2 CABLE ATTACHMENT: OUTER: CLAMP, INNER: SOLDER ⚠


5.0 ENVIRONMENTAL

- 5.1 OPERATING TEMPERATURE RANGE: -20° C TO +80° C


12	GASKET	SILICONE	1	NONE
11	WASHER	STEEL	1	NICKEL
10	NUT	BRASS	1	NICKEL
9	CENTER CONTACT	BRASS	1	GOLD
8	NUT	BRASS	1	NICKEL 100μ" MIN.
7	WASHER	BRASS	1	NICKEL
6	GASKET	RUBBER	1	RED
5	BRAID CLAMP	BRASS	1	NICKEL 100μ" MIN.
4	WASHER	BRASS	1	NICKEL 100μ" MIN.
3	INSULATION	TEFLON	1	NONE
2	INSULATION	TEFLON	1	NONE
1	BODY	BRASS	1	NICKEL 100μ" MIN.
NO	DESCRIPTION	MATERIAL	Q'TY	FINISH



SCALE 2:1
MOUNTING HOLE



STRIPPING DIMENSION

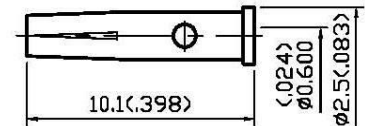

APPROVED by _____ DATE: _____



DESCRIPTION		BNC STRAIGHT BULKHEAD JACK CLAMP						
製圖	DRAWN	TOLERANCE	品名	13-02-2 T.G.N 179U	日期	DATE	版次	REV.
	<i>Kristina</i>							
檢圖	CHECK	TOLERANCE	單位	DWG.NO.	13-0463			
	<i>Arc</i>					±0.1	mm(in)	
認定	APPROVAL	TOLERANCE	比例					
	<i>Angela</i>			±0.05	SCALE			
		ANGLE	±5°					