



ENGLISH


Male/Male Cylindrical Bobbins

Cylindrical Bobbin mounts are simple and cost-effective vibration isolators that can be used in either compression and/or shear. Made from natural rubber and zinc plated mild steel.

Applications:

- Static generator engines
- Compressors
- Motors

H = Height
 D = Diameter
 G = Tread
 L = Stud Length

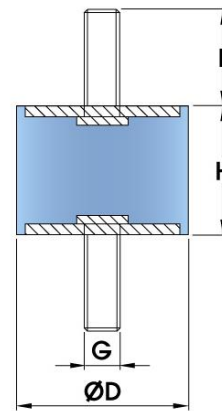

RS Part Number	Hardness (ShA)	D (mm)	H (mm)	G x L (mm)	Max Compression Load (kg)	Max Shear Load (kg)
1961317	60	8	5	M3X6	4.85	1.6
1961318	60	10	10	M4X10	7.7	3.1
1961319	45	10	10	M4X6	2.5	1
1961320	60	15	15	M4X10	13.3	5.2
1961323	55	20	10	M6X15	25.9	7.3
1961324	55	20	15	M6X15	20.4	7.3

1961325	45	20	20	M6X20	11	4.2
1961326	50	25	22	M8X20	22.6	8.3
1961327	50	30	12	M8X15	114.3	26.4
1961328	50	30	15	M8X15	48	12.1
1961329	55	30	20	M8X15	48	16.6
1961330	45	40	20	M8X23	63.2	17
1961331	60	40	40	M10X25	93.5	36.9
1961332	55	50	25	M10X30	152	46.2
1961333	60	50	40	M10X30	153.3	57.7
1961334	60	50	50	M10X30	146	57.7
1961335	60	50	55	M12X28	142	57
1961336	60	60	60	M10X25	136	68
1961337	60	75	40	M12X40	324.8	80