


# Datasheet

## Fibre Optic Cable Assembly

RS Stock number 536-8395



### Dimensions (mm)

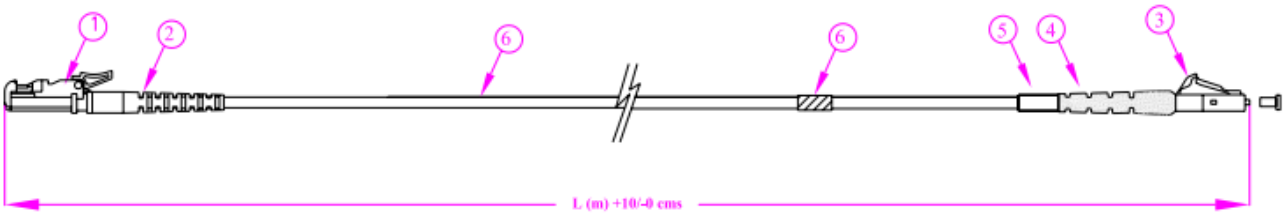

No.	Description	QTY
1	E2000 Connector	1
2	E2000 Boot	1
3	LC Simplex Connector	1
4	LC Boot	1
5	LC Heat Shrink Tube	1
6	Identification Label	1
7	1.6mm Simplex Cable	1

### Optical Performance

Multimode :(@ 1300mm)  
 Max IL : 0.30dB Typical: 0.20dB  
 Singlemode: (@1310mm and/or 1550mm)  
 E-2000: Max. IL-0.30dB  
 Typical: 0.20dB  
 Return Loss: >50dB  
 RoHS Compliant  
 Coiling Diameter: Coiling Diameter of the Patchcord shall be greater than 200mm