

Electrical Test:


1. 100%Test(Open, short ,miss wire)
2. Contact Resistance: 2 ohm max.
3. Insulation Resistance: 5M ohm min.
4. Hi-pot:300V DC/10ms

NOTE:

1. Super High Speed USB 3.1 Cable (30AWG\*1P+D+AL+MY)\*4C+30AWG\*1P+30AWG\*4C +22AWGT\*2C+F+AB OD:5.0±0.2mm Color: Black
- 2.USB3.1 (C) M Solder Type Shell Nickel, Black Insulation,With USB3.1 C EMARK, PCB+SMT
- 3.INSIDE MOLDING:PE
- 4.OUTSIDE MOLDING:Black PVC

Part No.	Length
11.02.9050	500±30mm
11.02.9051	1000±30mm

Pin Assignment

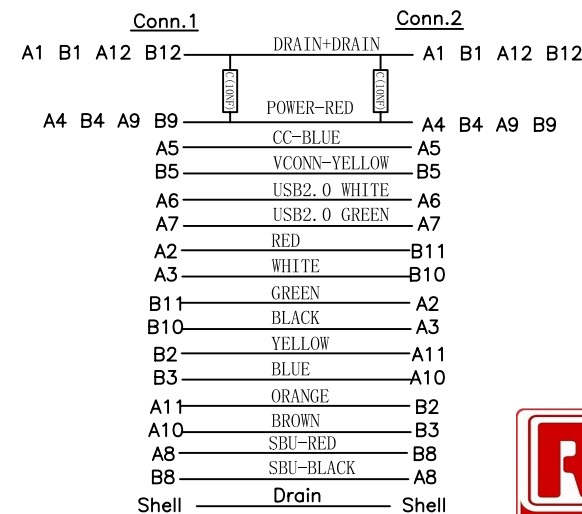

REV.	DATE	CONTENTS OF CHANGE	DESIGNER	TOL ±	V								APPROVAL	CHECK	DRAWING	DESIGN	DRAWING NAME	ROLINE USB 3.1 Cable		
					Plc	Met	Ins	Por	Cab	Pac	Gas	DIS						DATE	C/C, M/M, w/PD, 20V5A, Black	PART NO.
△				RANGE																
△				0~6	0.1	0.1	0.1	0.2	0.5	1	0.5	0.2								
△				6~30	0.1	0.1	.15	.25	1	1	0.5	.25								
△				30~80	0.1	.15	0.2	0.3	2	1.5	1	0.3								
△				80~180	.15	.15	.25	0.3	2	2	1	.45								
△				180~315	.15	0.2	0.3	0.4	2.5	2	1	0.6								
△				315~800	0.2	0.3	0.4	0.5	3	3	2	1.1								

HENRY

SCALE 1:1 UNIT MM