

SD CARD & PC-Link Tube/Label Print

DRK 2800 TM





Save files from your computer to <u>SD card</u> and print using our Printer's card reader




Suitable for Windows 7 and Windows 8 operating system!







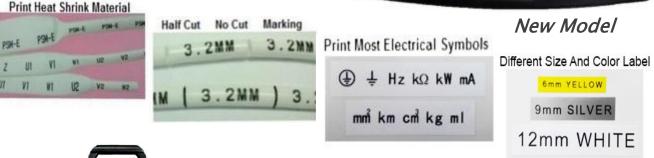



FREE hard suitcase to protect the tube printer effectively!

Specifications and design of the products are subject to change without advance notice for products improvement

New Model Enhancement

High-speed marking

DRK 2800 provides you with marking speed at 40pcs per minute. (20mm per piece)

Maximum printing size

DRK 2800		
TUBE	Ø2 mm - Ø6 mm	
TAPE	6, 9, 12mm width	

Maximum 12,00,000 characters built-in large memory storage

DRK 2800		
Rows per file	200	
Maximum files	100	

Cutting Depth Adjustment

Selectable automatic half-cutting, no cutting or lines printing, cutting dept can be adjust

Many kinds of font styles

Bold, Italic, Underline, Shadow, Outline, Superscript, Subscript, Border with shade, Border, Horizontal and Vertical Printing

Access from your PC & SD Card



Consumables





Item code
DR800BK
DR800W
DR800R
DR806W
DR809W
DR812W
DR806Y
DR809Y
DR812Y
DR806S
DR809S
DR812S

Product name

Ribbon Cassette Black (100m) Ribbon Cassette White (80m) Ribbon Cassette Red (80m) Label Tape 6mm x 16m (White) Label Tape 9mm x 16m (White) Label Tape 12mm x 16m (White) Label Tape 6mm x 16m (Yellow) Label Tape 9mm x 16m (Yellow) Label Tape 6mm x 16m (Silver) Label Tape 9mm x 16m (Silver)

Marking Materials

Ø2 mm to Ø6 mm Heat-shrinkable tube and PVC tubes are applicable. DRK 2800 tapes of 6mm, 9mm and 12mm width are available.

SPECIFICATIONS

ITEMS	CONTENTS
Name	DRK 2800 TUBE/LABEL PRINTER
Dimensions	280 (W) X 320 (L) X 100 (H)mm
Weight	3∎2kg
Printing method	Thermal transfer method (300dpi)
Display	7-rows characters, 10-rows contents
Printing speed	40 piece /min (half cut, 20mm/piece)
Max. Printing size	Tube : Ø6.0mm, Tape : 12mm width
Max. characters to input	12,000,000 characters at most
Character size	Tube : 1-5, Label : 1-7
Repeat	1 to 200 times
Usable tube	Ø2 mm - Ø6 mm (PVC & Heat Shrink Tube)
Usable tape	Width 6, 9, 12mm (DRK 2800 Label Tape)
Tube cutting method	Auto half-cut, End full cut
External memory	SD Card
Power supply	DC 12V 3A (both connection wire & adapter had passed through 3C certification)
Operating environment	15 to 35℃