




Datasheet

ENGLISH

146-4644

RS PRO AHD IR BULLET CAMERA(1080P)

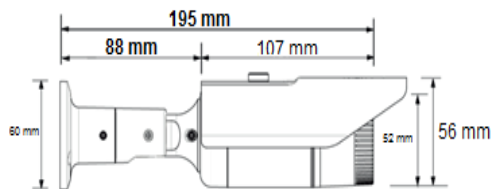

** OSD controller



Feature

- 1/2.9" 2.12 MP Sony CMOS Sensor
- AHD(1080P)_1100TVL
- CVBS(1280H)_1000TVL
- Video Output : AHD / CVBS Convertible
- Min. Ill : 0.08 Lux / color, 0.008 Lux/BW, 0 Lux(IR ON)
- 3D-DNR, SENS-UP (X6)
- Mega 3.6mm Fixed Lens
- 24IR LEDs
- Power requirement : DC12V (±30%),
Power source is not included
- IP67 Weatherproof

Specifications		NTSC / PAL	
Image Device		1/2.9", 2.12 Megapixel Sony Exmor CMOS	
Total Pixels / Active Pixels		2001(H) x 1121(V) / 1936(H) x 1097(V)	
Scanning System		Progressive	
Resolution		AHD2.0 (1080P)_1100TVL, CVBS(1280H)_1000TVL	
S/N		More than 52dB(AGC Off)	
Video Output		AHD(To Right@key OSD) / CVBS(To Left@key OSD) NTSC / PAL - Selectable in OSD MENU VIDEO OUT(AHD & CVBS)	
Min. Illumination		COLOR : 0.08Lux / BW : 0.008Lux Color Sens-up :0.008Lux / BW Sens-up :0.0008Lux	
OSD Functions	White Balance	ATW/ AWC-SET / INDOOR / OUTDOOR / MANUAL / AWB	
	Exposure	DC / MANUAL	
	Shutter Speed	AHD	AUTO / FLK
		CVBS	NTSC :1/30 ~1/50.000sec / PAL :1/25 ~1/50.000sec
	SENS-UP	AUTO(x6) / x2.x4.x6.x8.x10.x15.x20.x25.x30	
	Backlight Compensation	OFF/BLC / HSBLC	
	Privacy Masking	4 Zone	
	Day & Night	AUTO / COLOR / BW / EXT	
	Motion Detection	OFF / ON	
	2DNR	AHD	OFF / LOW / MIDDLE / HIGH
		CVBS	
	3DNR		
	Digital Effect	OFF / MIRROR / V-FLIP / ROTATE & FREEZE	
	Sharpness / DEFOG	Adjustable / ON / OFF	
Image Enhancement	D-WDR		
LANGUAGE	ENG/GER/FRA/ITA/SPA/POL/RUS/POR/NED/ TUR/KOR/JPN/HEB/ARB		
Power Input / Consumption		DC+12V (100mA) ± 30%,	
Operation/Storage Temp.		-10°C - +50°C / -20°C - +60°C	
Dimension (mm)		Ø52 x 107 (mm)	
Cable		Standard 500mm BNC/DC jack	