


- Customization
- 01 series
- 03S series
- 05S series
- 07S series**
- 08 series
- 09C series
- 10 series
- 11 series
- 12 series
- 13 series
- 17 series
- 20 series
- 21 series
- 23 series
- 24 series
- 27 series
- 28 series
- 30 series
- 35 series
- 43 series
- F02 series
- L01 series

07S

kg 175-500

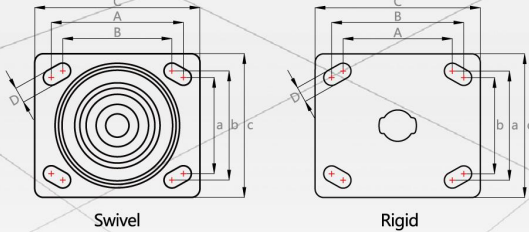

PU

Standard	Result
T/ZSJL 001-2019	✓
T/ZSJL 002-2019	✓
T/ZSJL 003-2019	✓

Wheel: Thermoplastic polyurethane (PU).
Wheel surface hardness: 98-100° Shore A.
Wheel core structure: polypropylene (PP).
Bearing: SUPO customization double ball bearing with plastic dust-proof cover.

* Remark: Please refer to the standard of Zhongshan caster industry association.

For more information please refer to page308.

Swivel Top Plate	Wheel Material	NO.	Wheel Dia (mm)	Tread Width (mm)	Load Capacity (kg)	Load Height (mm)	Swivel Radius (mm)	Brake Swivel Radius (mm)	Bearing	Plate size (mm)	Hole Spacing (mm)	Hole size (mm)
	(PU)	J07S-01-100-262	100(4")	45	235	143	87	139		(C)115x100	(A)92x67 (B)76x76	(D)11
		J07S-01D-100-262										
		J07S-04-100-262										
	(PU)	J07S-01-125-262	125(5")	45	290	164	104	149		(C)115x100	(A)92x67 (B)76x76	(D)11
		J07S-04-125-262										
		J07S-01-150-262										
	(PU)	J07S-01D-150-262	150(6")	45	350	190	121	150		(C)115x100	(A)92x67 (B)76x76	(D)11
		J07S-04-150-262										
		J07S-01-200-262										
	(PU)	J07S-01D-200-262	200(8")	45	380	240	158	172		(C)115x100	(A)92x67 (B)76x76	(D)11
		J07S-04-200-262										

Others (MOQ)



Top plate with side lock
brake(metal)
 J07S-01C-100-262
 J07S-01C-125-262
 J07S-01C-150-262
 J07S-01C-200-262