


FEATURES

- 0.5mm probe diameter
- Grounded hot junction for fast response time
- Range of probe diameters available

RS PRO Type K Thermocouple 150mm Length, 0.5mm Diameter → +750°C

RS Stock No.:443-7967

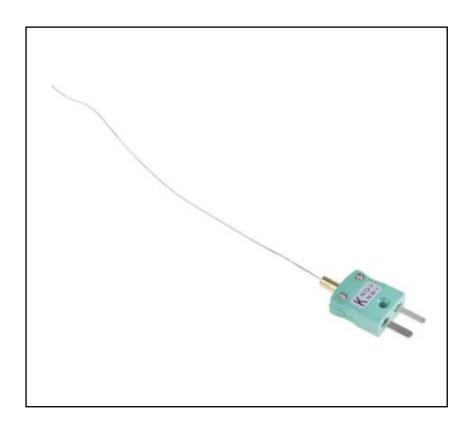

RS Professionally Approved Products bring to you professional quality parts across all product categories. Our product range has been tested by engineers and provides a comparable quality to the leading brands without paying a premium price.

Thermocouples



Product Description

These Type K thermocouple probes have a rugged construction and feature a stainless steel 310 probe sheath which is mineral insulated for flexibility, allowing it to bent and formed to suit a wide range of applications. The probe is terminated with a miniature IEC flat pinned plug with a maximum temperature range of 200°C, for a quick and simple connection. The thermocouple has a single element grounded hot junction for a fast response time

General Specifications

Thermocouple Type	Type K			
Temperature Measurement Range	-40°C to 750°C			
Construction	Flexible mineral insulated probe with 310 stainless steel sheath			
Measuring Junction	Grounded			
Application	heat exchangers, power stations, brick and cement kilns, heat treatment and annealing furnaces, thermostats, food thermometers, vehicle diagnostics and in laboratories			

Mechanical Specifications

Probe Diameter	0.5mm
Probe Length	150mm
Probe Body Material	Stainless Steel
Insulation / Sheath Material	310 stainless steel sheath
Termination Type	Miniature Plug

Approvals

Standards Met	IEC



	Conductors	Cores		Jacket	Reel Length	Allied	RS order code
	Conductors	20.23		active to	neer zengen	Code	no oraci coac
Exte	nsion:						
KX	7/0.2mm	+Green/-W	+Green/-White		10 metres	70657084	827-5615
KX	7/0.2mm	+Green/-W	+Green/-White		25 metres	70641729	236-3820
KX	7/0.2mm	+Green/-White		Green	50 metres	70657085	827-5619
KX	7/0.2mm	+Green/-W	+Green/-White		100 metres	70646156	611-7889
KX	7/0.2mm	+Green/-W	/hite	Green	200 metres	70657088	827-5628
JX	7/0.2mm	+Black/-Wi	nite	Black	10 metres	70641640	219-4753
JX	7/0.2mm	+Black/-Wl	nite	Black	25 metres	70657078	827-5592
JX	7/0.2mm	+Black/-Wi	nite	Black	50 metres	70657079	827-5596
JX	7/0.2mm	+Black/-Wi	nite	Black	100 metres	70641737	236-3915
JX	7/0.2mm	+Black/-Wl	nite	Black	200 metres	70657081	827-5606
TX	7/0.2mm	+Brown/-W	/hite	Brown	10 metres	70641637	219-4703
TX	7/0.2mm	+Brown/-W	/hite	Brown	25 metres	70641734	236-3870
TX	7/0.2mm	+Brown/-W	/hite	Brown	50 metres	70657095	827-5653
TX	7/0.2mm	+Brown/-W	/hite	Brown	100 metres	70651749	762-1146
TX	7/0.2mm	+Brown/-W	/hite	Brown	200 metres	70657098	827-5662
NX	7/0.2mm	+Pink/-Wh	ite	Pink	10 metres	70641635	219-4668
NX	7/0.2mm	+Pink/-Wh		Pink	25 metres	70657091	827-5637
NX	7/0.2mm	+Pink/-Wh	ite	Pink	50 metres	70657089	827-5631
NX	7/0.2mm	+Pink/-Wh	ite	Pink	100 metres	70657092	827-5640
T/C	Conductors	Length	Termination		-Negative	Allied	RS order
Type				tail wire	tail wire c	ode Code	Code
'K'	1/0.2mm	1 metre	Mini plug	Green	White	70643600	363-0250
'K'	1/0.2mm	2 metre	Mini plug	Green	White		110-4482
'K'	1/0.2mm	5 metre	Mini plug	Green	White		123-6306
'K'	1/0.2mm	10 metre	Mini plug	Green	White		123-6307
'J'	1/0.2mm	1 metre	Mini plug	Black	White	70643599	363-0244
J'	1/0.2mm	2 metre	Mini plug	Black	White		123-6308
J'	1/0.2mm	5 metre	Mini plug	Black	White		123-6309
J'	1/0.2mm	10 metre	Mini plug	Black	White		123-6310
'T'	1/0.2mm	1 metre	Mini plug	Brown	White	70643601	363-0266
'T'	1/0.2mm	2 metre	Mini plug	Brown	White	70043001	123-6311
T'	1/0.2mm	5 metre	Mini plug	Brown	White		123-6312
T'	1/0.2mm	10 metre	Mini plug	Brown	White		123-6312
	-, 0.2	20	piug	2.0	.,,,,,,		

Thermocouples

U (RCA)

13/0.2mm

+Orange/-White




T/C Type	Conduc	ctors	Cores		Reel Length	Allied co	de RS order o	ode
1	1/0.2m 1/0.2m		+Black/-White +Black/-White		25 metres 50 metres	7065719 7065719		
J	1/0.315mm		m +Black/-White		25 metres	7065719	8 827-5993	
j	1/0.315mm		+Black/-White		50 metres	7065719		
K	1/0.315mm		+Green/-White		25 metres	7065720		
K	1/0.315		+Green/-		50 metres	7065720		
T	1/0.315		+Brown/		25 metres	7065720		
Т	1/0.315	5mm	+Brown/	-White	50 metres	7065720	6 827-6022	
J	1/0.508mm		nm +Black/-White		25 metres	7065719	7 827-5990	
J	1/0.508	3mm	nm +Black/-White		50 metres 7065720		1 827-6003	
K	1/0.508	3mm			25 metres	7065720	3 827-6012	
K	1/0.508	3mm	+Green/-White		50 metres	7065720	4 827-6016	
J	7/0.2m	m	+Black/-\	White	25 metres	7065720	2 827-6006	
K	7/0.2m	m	+Green/-	White	25 metres 7065720		7 827-6025	
T	7/0.2m	m	+Brown/	-White	25 metres	7065720	9 827-6031	
N	7/0.2m	m	+Pink/-W	/hite	25 metres	7065721	0 827-6034	
T/C Type	Conductors	Cores		Jacket	Reel Length	n Allied code	RS order code	9
Extension:								
KX	7/0.2mm	+Yello	w/-Red	Yellow	25 m	70656102	814-0018	
KX	7/0.2mm		w/-Red	Yellow	100 m	70656105		
KX	7/0.2mm		w/-Red	Yellow	200 m	70656103		
			te/-Red Black					
JX	•				25 m	70656096		
JX	7/0.2mm		te/-Red	Black	100 m	70656098	8 14-0005	
JX	7/0.2mm	+ Whi	te/-Red	Black	200 m	70656099	814-0008	
TX	7/0.2mm	+Blue	/-Red	Blue	25 m	70656119	814-0074	
TX	7/0.2mm	+Blue	/-Red	Blue	100 m	70656122	814-0083	
TX	7/0.2mm	+Blue	/-Red	Blue	200 m	70656123	814-0086	
Compensating	:							
VX (KCB)	7/0.2mm	+Yello	w/-Red	Yellow	25 m	70656127	814-0103	
VX (KCB)	7/0.2mm		w/-Red	Yellow	100 m	70656130		
VX (KCB)	7/0.2mm		w/-Red	Yellow	200 m	7065613		
Compensating:	Conductors	Cores		Jacket	Reel Length	Allied Code	RS order code	
VX (KCB)	7/0.2mm	+Green	/-White	Green	10 metres	70657082	827-5609	
VX (KCB)	7/0.2mm	+Green		Green	25 metres	70641629	219-4551	
VX (KCB)	7/0.2mm	+Green		Green	50 metres	70657080	827-5603	
VX (KCB)	7/0.2mm	+Green		Green	100 metres	70641630	219-4573	
VX (KCB)	7/0.2mm	+Green		Green	200 metres	70657083	827-5612	
VX (KCB)	13/0.2mm	+Green		Green	10 metres	70657086	827-5621	
VX (KCB)	13/0.2mm	+Green		Green	25 metres	70657087	827-5625	
VX (KCB)	13/0.2mm	+Green		Green	50 metres	70657090	827-5634	
VX (KCB)	13/0.2mm	+Green	-White	Green	100 metres	70651750	762-1152	
U (RCA)	7/0.2mm	+Orang	e/-White	Orange	10 metres	70657096	827-5656	
U (RCA)	7/0.2mm	+Orang	e/-White	Orange	25 metres	70646158	611-7902	
U (RCA)	7/0.2mm	+Orang	e/-White	Orange	50 metres	70657097	827-5659	
U (RCA)	13/0.2mm	+Orang	e/-White	Orange	10 metres	70641641	219-4769	
U (RCA)	13/0.2mm		e/-White	Orange	25 metres	70657093	827-5643	
II (RCA)	13/0.2mm		e/-White	Orange	50 metres	70657094	827-5647	

Orange

50 metres

827-5647



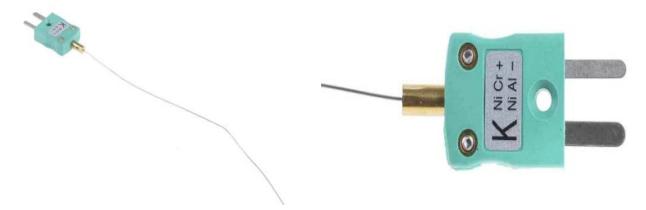

T/C Type KX	Conductors 1/0.2mm	Cores +Yellow/-Red	Reel Length 25 metres	Allied code 70656106	RS order code 814-0030
	•				
KX	1/0.2mm	+Yellow/-Red	50 metres	70656111	814-0049
KX	1/0.2mm	+Yellow/-Red	100 metres	70656109	814-0042
KX	7/0.2mm	+Yellow/-Red	25 metres	70656110	814-0046
KX	7/0.2mm	+Yellow/-Red	50 metres	70656113	814-0055
KX	7/0.2mm	+Yellow/-Red	100 metres	70656114	814-0058
KX	1/0.3mm	+Yellow/-Red	25 metres	70656104	814-0024
KX	1/0.3mm	+Yellow/-Red	50 metres	70656107	814-0033
KX	1/0.3mm	+Yellow/-Red	100 metres	70656108	814-0036
TX	1/0.3mm	+Blue/-Red	25 metres	70656121	814-0080
TX	1/0.3mm	+Blue/-Red	50 metres	70656126	814-0099
TX	1/0.3mm	+Blue/-Red	100 metres	70656124	814-0092
	,				
TX	1/0.2mm	+Blue/-Red	25 metres	70656125	814-0096
TX	1/0.2mm	+Blue/-Red	50 metres	70656128	814-0106
TX	1/0.2mm	+Blue/-Red	100 metres	70656129	814-0109