


Datasheet

SPDT PCB ON-ON, Push Button Switch


RS Stock number 734-6808

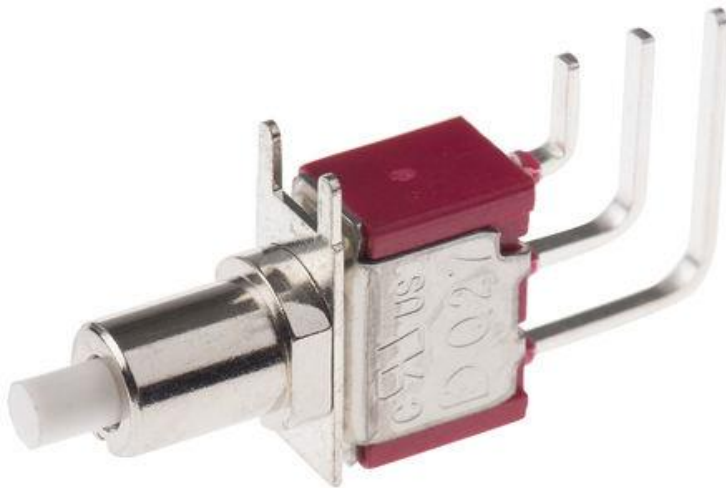

Specifications:

Mechanical Life:	50,000 make-and-break cycles
Contact Resistance:	20m Ω max. initial @ 2-4VDC 100mA for both silver and gold plated contacts
Insulation Resistance:	1,000 Ω min.
Dielectric Strength:	1,000 V rms @ sea level
Operating Temperature:	-30°C to 85°C
Case:	Diallyl phthalate (DAP) (UL94v-0)
Plunger:	Glass filled nylon or glass filled polyester
Bushing:	Brass, nickel plated
Housing:	Stainless steel
Contact:	Silver or gold plated
RoHS:	2002/95/EC

**Dimensions – inch
mm**

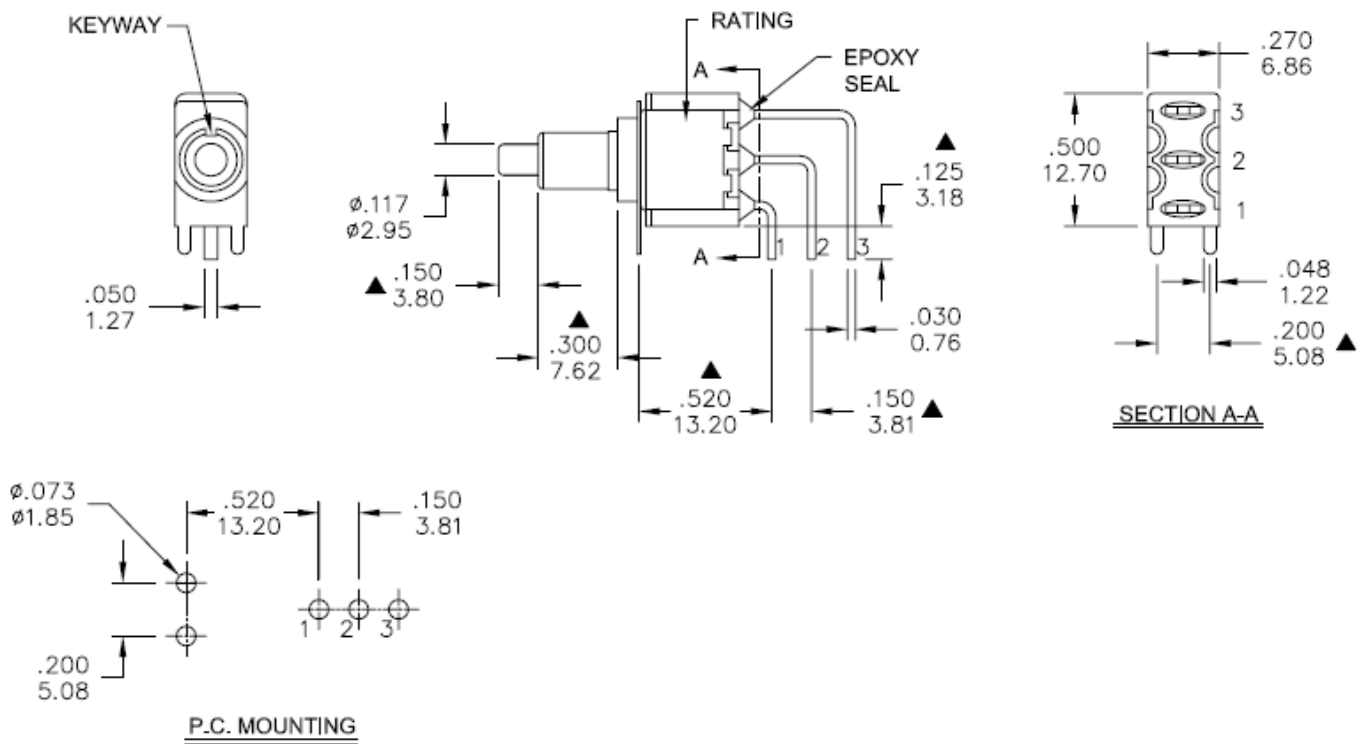

Model No.	POS.1	POS.2
	7MSL	ON
Term. Comm.	1-2	2-3
SCHEMATIC		

SWITCH FUNCTION