





Normal Geometric Tolerancing			
—	//	≡	⊥
0 to 100	0.2	0.3	0 to 10
over 100 to 150	0.3		over 10
over 150	0.5		
Total Pitch Tolerances		Normal Dimension Tolerances	
0~30	±0.20	0~30	±0.25
over 30~53	±0.25	over 30~53	±0.30
over 53~70	±0.30	over 53~70	±0.35
over 70~90	±0.35	over 70~90	±0.44
over 90~115	±0.44	over 90~115	±0.55
over 115~150	±0.55	over 115~150	±0.70
over 150~200	±0.70	over 150~200	±0.85
over 200~250	±0.85	over 200~250	±1.00
over 250~320	±1.00	over 250~320	±1.20

6.2



2

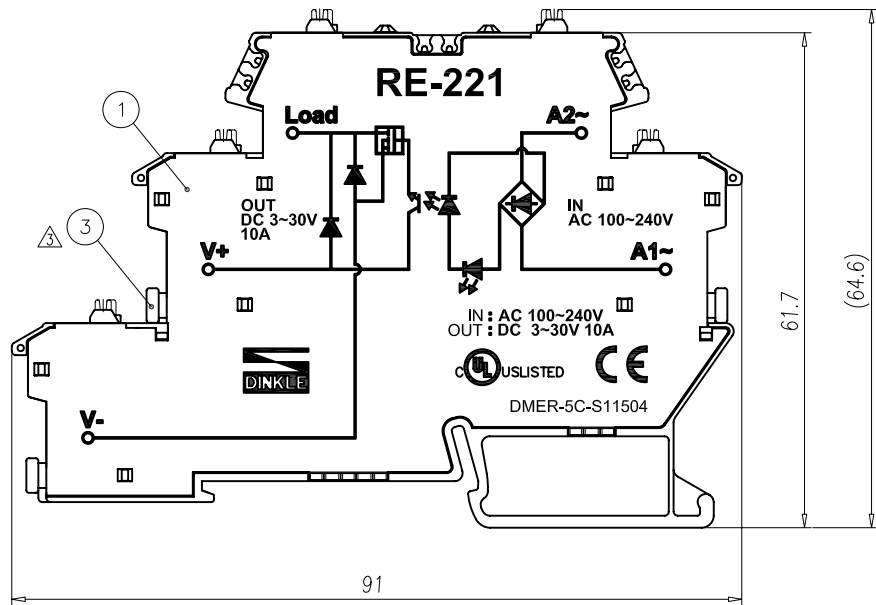

NOTES:

1. Rating: Input : 100~240VAC
Output : 3~30VDC 10A
2. Insulation Withstands Voltage: AC 2500V at 1 minute
3. Insulation Resistance: 500MΩ or more at DC500V
4. Operation Temperature Range: -25°C~+60°C
5. Suitable Electric Wire: AWG 24~12
6. RoHS Compliance

3	JUMPER		GRAY
2	COVER		BLACK
1	RE-2213-W		BLACK
ITEM	NAME OF PART	MATERIAL	NOTES

DWG.	W.ZJ	DATE	15.02.11	UNITS	MM	SHEET/OF	1 / 1
CHK.		DATE		SCALE	1.5:1 (:)		
APP.		DATE		NAME	RE-2213		
				DWG NO.	SP-03-RE221300		

3			
REV.	CONTENT	NAME	DATE