

RoHS
Compliant

Features

- LCD Display with Green backlight
- Precise time Programming for Daily / Weekly / Pulse switching
- Bar graph showing Daily program
- 50 ON/OFF programs, 10 Holiday Programs
- Settable DST feature & Password protection
- 16A Single and Dual relay outputs
- Two Separate Relay outputs with independent Programming
- 12/24 Hour Display Format
- 6 Years Battery reserve
- Simple reset & Manual Override
- Service / Load hours measurement

Specification


Part Number	MP008390	
Parameters		
Supply Voltage	240V AC	
Supply Variation	-20% to +10%	
Frequency	50-60 Hz	
Power Consumption	6 VA Max.	
Number of Programs	50 Each channel + 10 for Holiday	
Minimum Switching Time	1 sec	
Pulse Duration	1 - 59 sec	
Number of Operating Modes	5	
Description of Modes	<ul style="list-style-type: none">• AUTO - Program Run• ONAUTO - Instant ON up to next Auto Event• AUTO OFF - Instant OFF up to next Auto Event• ON - Continuous ON• OFF - Continuous OFF	
Display	LCD with backlight	
DST	Programmable	
Clock Accuracy	± 0.5 s/day max. over the Operating Temperature range	
Power Reserve from Factory	6 Years	
Output	Relay Output	1 C/O
	Contact Rating	16 A(NO) & 16 A (NC) @ 240V AC/24V DC (Resistive)
	Electrical Life	5 × 10 ⁴
	Mechanical Life	5 × 10 ⁴

Digital Time Switch

multicomp PRO

Utilization Category	Max switching : 16 A (NO & NC) at 250 VAC, Cos ϕ = 1
	Min Switching: 10 A (NO & NC) at 250 VAC, Cos ϕ = 0.6
Operating Temperature	-10°C to +55°C
Storage Temperature	-20°C to +70°C
Humidity (Non Condensing)	95% (Rh)
LED Indication	Red LED—Relay ON
Enclosure	Flame Retardant UL94-VO
Dimension (W x H x D)	36mm x 90mm x 65mm
Weight (unpacked)	110 g
Mounting	DIN rail
Degree of Protection	IP 20 for Terminals, IP 30 for Enclosure


Mounting Dimensions

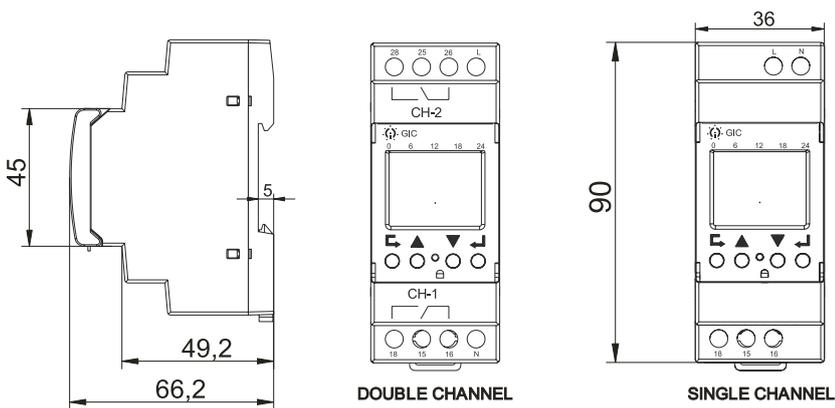


Connection Diagram

Digital Time Switch

A) 1 CH Device




B) 2 CH Device

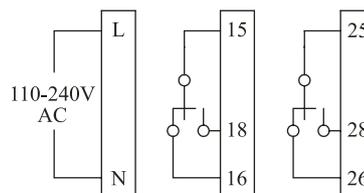

Newark.com/multicomp-pro
 Farnell.com/multicomp-pro
 sg.element14.com/b/multicomp-pro

multicomp PRO

Terminal Torque & Capacity

 Ø 4.5 mm	0.5 N.m (4.4 Lb.in)
	1 x 4.0 mm ² Solid/Stranded Wire
AWG	26 to 10

Dimensions : Millimetres

Part Number Table

Description	Part Number
Digital Time Switch, 1CO, 240V AC, LCD Display	MP008390
Digital Time Switch, 2CO, 110-240V AC, LCD Display	MP008391

Important Notice : This data sheet and its contents (the "Information") belong to the members of the AVNET group of companies (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. Multicomp Pro is the registered trademark of Premier Farnell Limited 2019.

Newark.com/multicomp-pro
Farnell.com/multicomp-pro
sg.element14.com/b/multicomp-pro