



# TL-D Standard Colours

## TL-D 18W/54-765 1SL/25

Low-pressure mercury discharge lamps with a tubular 26 mm envelope

### Warnings and Safety

- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

### Product data

General Information	
Cap base	G13 [ Medium Bi-Pin Fluorescent]
Life to 10% failures (nom.)	10000 h
Life to 50% failures (nom.)	13000 h

Light Technical	
Colour Code	54-765
Lamp Luminous Flux 25°C EL (Nom)	1050 lm
Colour Designation	Cool Daylight
Lumen maintenance 10,000 hours (nom.)	75 %
Lumen maintenance 2,000 hours (nom.)	90 %
Lumen maintenance 5,000 hours (nom.)	80 %
Colour Temperature, horizontal (Nom)	6200 K
Colour Rendering Index, horiz (Nom)	72

Operating and Electrical	
Power (Rated) (Nom)	18.0 W
Lamp current (nom.)	0.360 A

Voltage (Nom)	59 V
Controls and Dimming	
Dimmable	Yes

Approval and Application	
Energy efficiency label (EEL)	B
Mercury (Hg) content (nom.)	8.0 mg
Energy consumption kWh/1,000 hours	22 kWh


Product Data	
Full product code	871150070267840
Order product name	TL-D 18W/54-765 1SL/25
EAN/UPC – product	8711500702678
Order code	928048005436
Numerator – quantity per pack	1
SAP numerator – packs per outer box	25
Material no. (12 NC)	928048005436
Net Weight (Piece)	0.070 kg

# TL-D Standard Colours

ILCOS code

FD-18/62/2A-E-G13


## Dimensional drawing

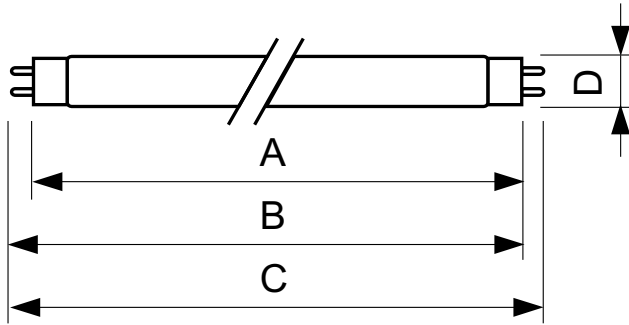


TL-D 18W/54-765

Product	D (max)	A (max)	B (max)	B (min)	C (max)
TL-D 18W/54-765 1SL/25	28 mm	589.8 mm	596.9 mm	594.5 mm	604 mm

## Photometric data

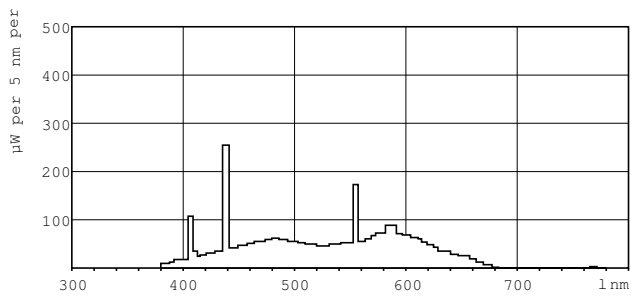


Lightcolour /54-765

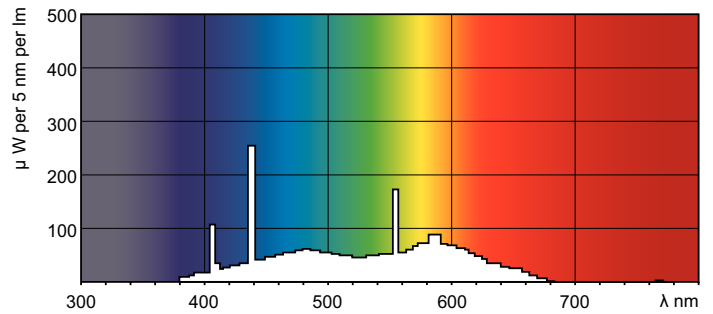


Lightcolour /54-765

## Lifetime

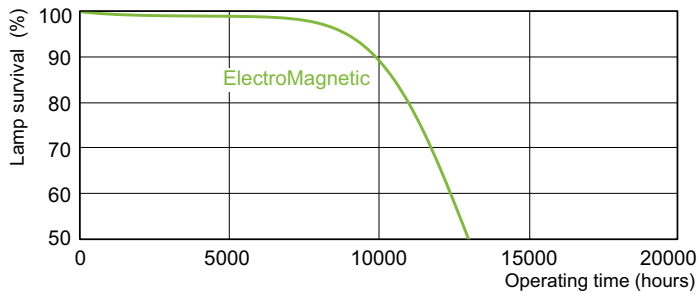


LDLE\_TL-DSTD\_0001-Life expectancy diagram

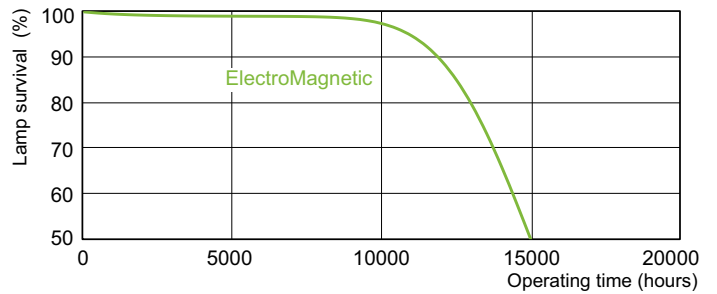

LDLE\_TL-DSTD\_0002-Life expectancy diagram

## TL-D Standard Colours

### Lifetime

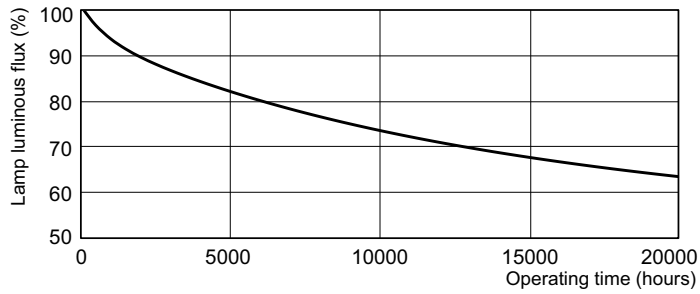

LDLM\_TL-DSTD\_0001-Lumen maintenance diagram

