

# EAJ 911 Anti-Seize Lubricant



PROFESSIONAL MAINTENANCE KIT

[www.toyointernational.com](http://www.toyointernational.com)



PART NO :8696G-1290

#### Safety Data Sheet

Safety data sheet can be requested via website [www.toyointernational.com](http://www.toyointernational.com) or you may also can get them from your local agent/ supplier.  
SDS Number: GP02-01

#### Storage and Handling

This product shall be ideally stored in a cool, dry location in unopened containers. Keep away from children.

#### Shelf Life

With good practicing on storage, the minimum shelf life from the batch number approx. 3 years or 36 months  
Condition of the product must in the unopened original container

#### Disclaimer:

This information is our best knowledge, true & accurate, subjected to change without prior notice due to continual product research and development. All recommendations or suggestions are without guarantee since the conditions of use are beyond our control. The manufacturers do not accept liability for any loss or damage, however arising, which results directly from the use of such information, nor do we offer any warranty of immunity against patent infringement.

#### PRODUCT DESCRIPTION

EAJ 911 is a premium quality copper anti-seize lubricant and thread lubricant that used to prevent seizing, corrosion and galling where high temperature conditions exist. EAJ 911 assures easier disassembly. Prevent seizure between metal parts to temperature of up to 1150°C/2102°F.

#### FEATURES AND BENEFITS


- Prevents rust, corrosion, galling and seizure and reduces wear between metal parts even operating at extreme high temperature and high load.
- Ensure easy dismantling of lubricated parts
- Resist galvanic attack even in the presence of strong chemicals and put metal parts under protection.

#### PRODUCT APPLICATION

- Spark plug threads installed in aluminium, exhaust manifold bolts, engine bolts, oxygen sensors, knock sensors, thermostat housing bolts, boiler hinges, fuel filter fittings and where extreme conditions of heat exist.

#### DIRECTION FOR USE

1. Before application, clean mating surface with Toyo Grease® Brake & Parts Cleaner spray.
2. Ensure the surface is clean and dry before application.
3. Apply EAJ911 Anti seize lubricant to the parts that require protection.
4. Reassemble parts and wipe off excess material.

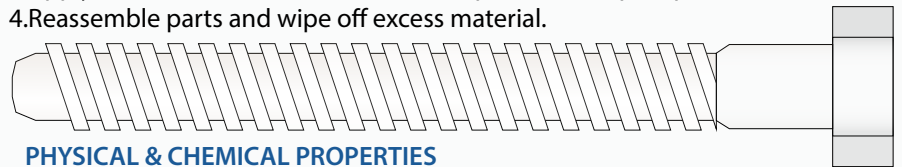

#### PHYSICAL & CHEMICAL PROPERTIES

NLGI Grade	1.5
Worked Penetration @ 25°C / 77°F, ASTM D-217	280 - 295
Appearance	Copper metallic paste
Specific gravity	1.45 - 1.55
Colour	Metallic brown
Dropping point, ASTM D-2265	Non-Melt
Temperature range	-20°C to 1150°C / -4°F to 2102°F

# TOYO GREASE

Issued: 05 OCT 2020  
TOYO GREASE MANUFACTURING | The Grease & Lubricant Manufacturer  
A Member Of NLGI, USA | National Lubricating Grease Institute