


Datasheet

Feed Through Terminal Block

RS Stock number 872-4697

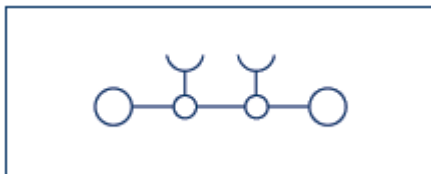

Feed-through terminal
2 connections

Features

- Foot can be snapped on TS 35 DIN rail
- Housing made from Polyamide 6.6 UL 94-V0

Specifications:

Rated cross-section, mm²|AWG: 16|16-4

Rated impulse voltage, kV|Contamination degree: 8|3

Plug gauge acc. to EN 60 947-1|Flamm. class acc. to UL 94: A7|V0

Connection data

Single wire (solid)|stranded, mm²: 1.5-25|-

Finely-stranded|finely-stranded (w/ferrules DIN 46 228/1), mm²: 1-25|1-16

Clamping area, mm²: 1.5-25

Stripping length, mm: 14

Torque, Nm|Screw: 2.5-3|Slotted M5