

Compact shower

Light. Compact. For emergency situations.



www.vetter.de/vetter_emergency/en/Medical+tents/Decontamination/Compact+shower.html

The pneumatic showers are set up in just 30 seconds and are instantly operational. They are used as emergency decontamination positions or applied in combination with tents.

The showers are constructed so that, due to their size, they can be easily and quickly integrated into the tents. Consequently the functional radius is extended by a clothe changing area.

In operation

- Epidemics
- Decontamination of patients in front of the hospital
- ABC- protection measures as a result of accident in plants and reactors, terrorist attacks or in war situations
- As a shower for staff or patients in the mobile hospital

Guaranteed quality

- Short erection times involving few staff
- Operationally flexible inside and outside the tent
- Quickly erected and operational
- Optional outside basin enables post- cleaning
- If required, integrated gloves for showering down of persons by staff

Emergency Pneumatics

- Can be supplied with drain in the shower basin in order to enable controlled drainage of contaminated liquids
- Extensive range of accessories

Good reasons

- Final inspection
- Testing at 1.3 times the operating pressure
- A safety valve (0.3 bar) integrated into the support frame avoids over- inflation
- Complete construction which is extremely sturdy
- A support frame made of a special tear- proof material
- Collection basin made of a polyester fibre coated with PVC on both sides (other qualities possible on request)


Standard equipment

- Shower curtain and the insertion basin are exchangeable
- Raised support frame for feet positioning (ergonomic position)
- Abrasion protection on the underside
- Shower hose is exchangeable
- 8 moveable shower heads positioned at different heights
- Facility for additional fitting of a decontamination hand shower

The standard colours



Do you require another colour? We make it possible: just ask us!

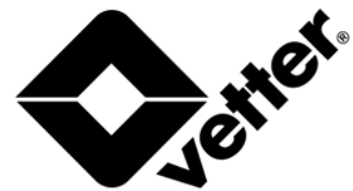

Emergency Pneumatics

Technical data

Art. no.	1513000102	1513000102
Art. no. with gloves	1513003500	1513003500
Art. no. with drain	1513003600	1513003600
Art. no. with gloves and drain	1513003700	1513003700
Erection time, ca.	30 sec.	30 sec.
Ext. basin size (L x W x H)	156 x 156 x 20 cm	5 x 5 x 0.65 ft
Int. basin size (L x W x H)	120 x 120 x 20 cm	4 x 4 x 0.65 ft
Total height	220 cm	7 ft
Air requirement	682 l	24 cu. ft
Capacity	300 l	11 cu. ft
Ø Water flow rate	25 l / min.	0.88 cu. ft / min.
Pack size	110 x 72 x 30 cm	43 x 28 x 12 inch
Weight, ca.	24 - 29 kg	53 - 64 lbs

All rights reserved for technical changes

Please contact us directly should you have any further questions concerning this product.

Sales Germany
Phone.: +49 (0) 22 52 / 30 08-50
Fax: +49 (0) 22 52 / 30 08-70
E- Mail: vetter.info@idexcorp.com

Sales international
Phone.: +49 (0) 22 52 / 30 08-60
Fax: +49 (0) 22 52 / 30 08-71
E- Mail: vetter.info@idexcorp.com

Or find the nearest dealer under:
[www.vetter.de/ support/ haendler](http://www.vetter.de/support/haendler)
