

Glass Passivated Superfast Rectifier

multicomp **PRO**

RoHS
Compliant



Features:

- Glass passivated die construction
- Superfast 35nS and 50nS recovery time
- Low forward voltage drop
- Low reverse leakage current
- Soft recovery characteristics
- Epoxy meets UL 94V-0 classification
- Ideally suited for use in high frequency SMPS, Inverters and as free wheeling diodes

Mechanical Data:

Case	: TO-220A, Molded Plastic
Terminals	: Pure tin plated, lead free solderable Per MIL-STD-202, method 208
Polarity	: As marked on the body
Weight	: 1.9 grams(approx)
Mounting Position	: Any
Mounting Torque	: 0.6 N.m Max.
Reverse Voltage	: 400 to 600 Volts
Forward Current	: 16 Amperes

Maximum Ratings and Electrical Characteristics:

Rating at 25°C ambient temperature unless otherwise specified.

Single phase, half wave, 60Hz, resistive or inductive load.

For capacitive load, derate current by 20%.

Characteristics	Symbol	MUR1640	MUR1660	Unit
Max. Recurrent Peak Reverse Voltage	V_{RRM}	400	600	V
Max. RMS Voltage	V_{RMS}	280	420	
Max. DC Blocking Voltage	V_{DC}	400	600	
Max. Average Forward Rectified Current	$I_{F(AV)}$	16		A
Peak Forward Surge Current 8.3ms Single Half Sine-Wave Super Imposed on Rated Load (JEDEC Method)	I_{FSM}	250		
Max. Forward Voltage at 16A per leg	V_F	1.3	1.5	V
Max. DC Reverse Current at $T_J = 25^\circ C$ Rated DC Blocking Voltage at $T_J = 125^\circ C$	I_R	10	500	mA
Max. Reverse Recovery Time (Note 1)	T_{RR}	50		nS
Typical Thermal Resistance, Junction to Ambient	$R_{\theta JA}$	73		°C/W
Typical Thermal Resistance, Junction to Case	$R_{\theta JC}$	1.2		
Typical Junction Capacitance (Note 2)	C_J	145		pF
Operating Temperature Range	T_J	-65 to +175		°C
Storage Temperature Range	T_{STG}			

Notes:

1. Measured with $I_F = 0.5A$, $I_R = 1.0A$, $I_{RR} = 0.25A$
2. Measured at 1.0 MHz and applied reverse voltage of 4.0V D.C.
3. The typical data above is for reference only

Newark.com/multicomp-pro
Farnell.com/multicomp-pro
Element14.com/multicomp-pro

multicomp **PRO**

Glass Passivated Superfast Rectifier

multicomp **PRO**

Ratings and Characteristic Curves

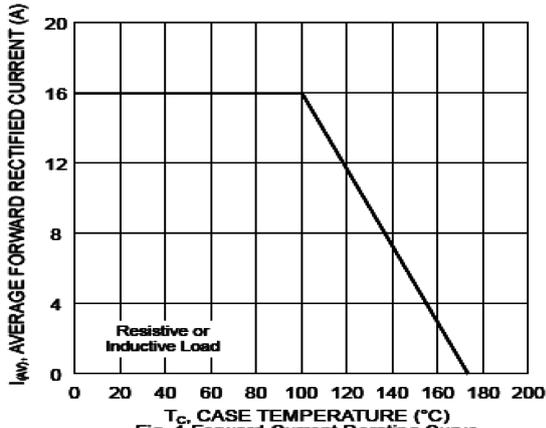


Fig. 1 Forward Current Derating Curve

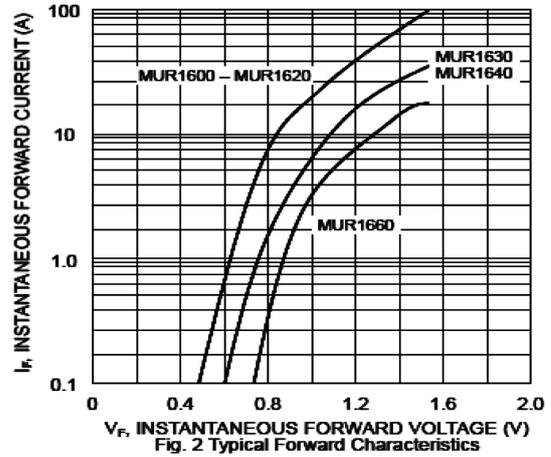


Fig. 2 Typical Forward Characteristics

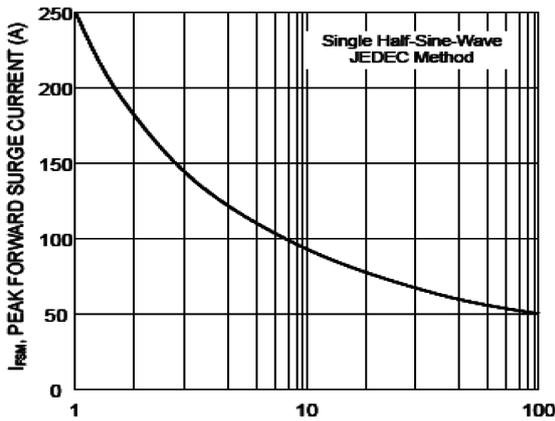


Fig. 3 Forward Surge Current Derating Curve

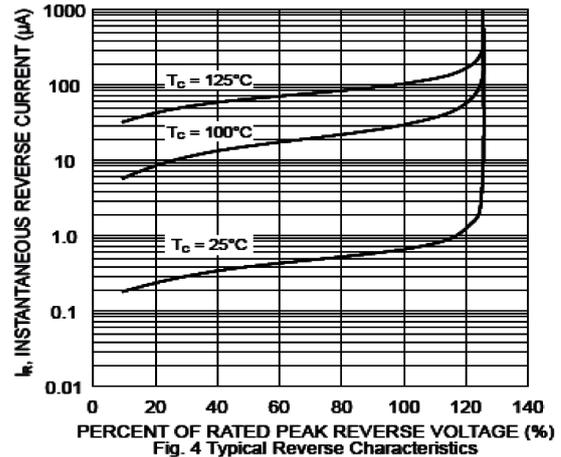


Fig. 4 Typical Reverse Characteristics

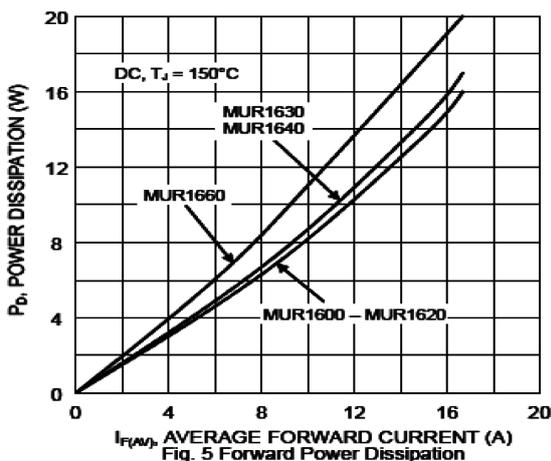


Fig. 5 Forward Power Dissipation


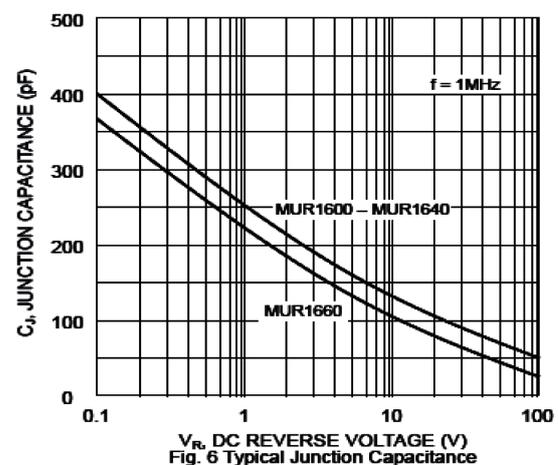


Fig. 6 Typical Junction Capacitance

Glass Passivated Superfast Rectifier

multicomp PRO

Dimensions:

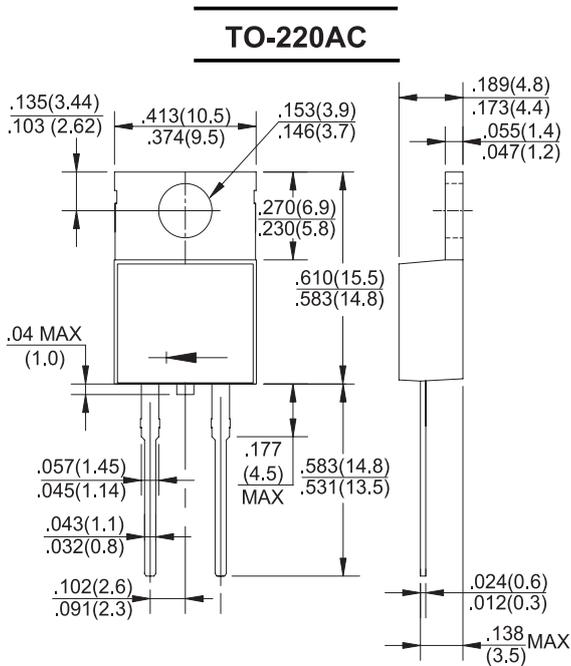

Dimensions : Inches (Millimetres)

Part Number Table

Description	Part Number
Glass Passivated Superfast Rectifiers	MUR1640
	MUR1660

Important Notice : This data sheet and its contents (the "Information") belong to the members of the AVNET group of companies (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. Multicomp Pro is the registered trademark of Premier Farnell Limited 2019.

Newark.com/multicomp-pro
 Farnell.com/multicomp-pro
 Element14.com/multicomp-pro

multicomp PRO