



Satisfy Professional's Needs

Drill
6411/ 6412/ 6413 10mm (3/8")

Overwhelming Performance

6412

- Keyed chuck
- Variable speed
- Reversing

6413

- Keyless chuck
- Variable speed
- Reversing

6411

- Keyed chuck
- Single speed

*Tool does not come with bit.



Compact and lightweight, yet with enough power

Drill

6411 / 6412 / 6413 10mm (3/8")

Powerful motor
450w

Lightweight
1.2kg(2.6lbs)

Compact: 228mm (9") (6411, 6412)


No load speed 3,000rpm
Optimum for light-duty jobs such as small hole drilling in wood

Chuck capacity:
1.5-10mm (1/16"-3/8")

Keyed chuck: 6411, 6412
Keyless chuck: 6413

Ergonomically designed rubberized grip

Provides more comfort and control while minimizing hand fatigue and pain.

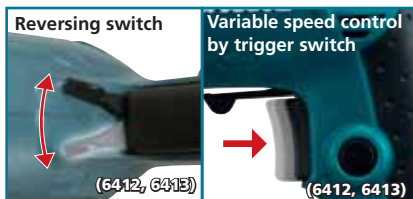

Lock-on button for long continuous operation

In-line design

Brings drilling pressure in line with center of drill bit axis.




All ball bearing construction



Comparison of Drilling Efficiency

Note: 1. It may differ under some conditions.
2. Numbers in the charts below are relative values when the capacity of competitor B model is indexed at 100.

Test conditions: Drilled holes through 60mm thick lauan plywood with 18mm diameter auger bit.

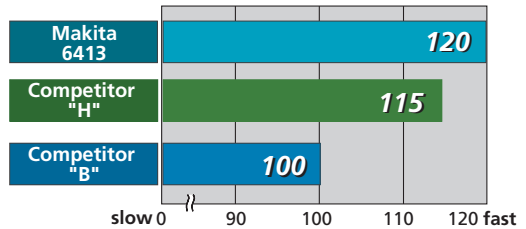

Drill

6411 / 6412 / 6413 10mm (3/8")

64

- Double Insulation
- Variable Speed (6412, 6413 only)
- Reversing (6412, 6413 only)
- Keyless Chuck (6413 only)

	6411	6412	6413
Continuous rating Input	450W	450W	450W
Capacity	Steel : 10mm (3/8") Wood : 25mm (1")	Steel : 10mm (3/8") Wood : 25mm (1")	Steel : 10mm (3/8") Wood : 25mm (1")
No load speed	3,000rpm	0-3,000rpm	0-3,000rpm
Dimensions (L x W x H)	228 x 64 x 183mm (9" x 2-1/2" x 7-1/4")	228 x 64 x 183mm (9" x 2-1/2" x 7-1/4")	234 x 64 x 183mm (9-1/4" x 2-1/2" x 7-1/4")
Net weight	1.2kg (2.6lbs)	1.2kg (2.6lbs)	1.2kg (2.6lbs)
Power supply cord	2.0m (6.6ft)	2.0m (6.6ft)	2.0m (6.6ft)

Standard Equipment
Chuck key (6411, 6412)

Items of standard equipment and specifications may differ by country or area.

Makita Corporation

3-11-8 Sumiyoshi-cho, Anjo, Aichi, 446-8502 Japan

PRINTED IN JAPAN Z23318-2 2007-04