



Datasheet

RS PRO NYLON CABLE GLAND (PG Thread)

Stock No. 2101348, 2101349, 2101351, 2101354, 2101356, 2101359, 2101362


EN



SPECIFICATION

- Material: UL approved Nylon 66, 94V-2
- Color: **Grey (RAL7001)**
- Suit a variety of applications, and diverse industries.
- Function : Mount gland to pre-drilled panel hole, use locknut to fix gland on board, insert the cables in the seal, and then tighten up the nut to hold cables in position.
- Feature : Simply and quickly fixed, high degree of the protection IP68 preventing dust and water.

- Available to order the accessories separately. Follow the drawing and add the letter to the suffix part number, L for locknut, W for washer, B for gland body, S for seal, N for nut. For example, EGL-7 if you would like to only order locknut for PG7.

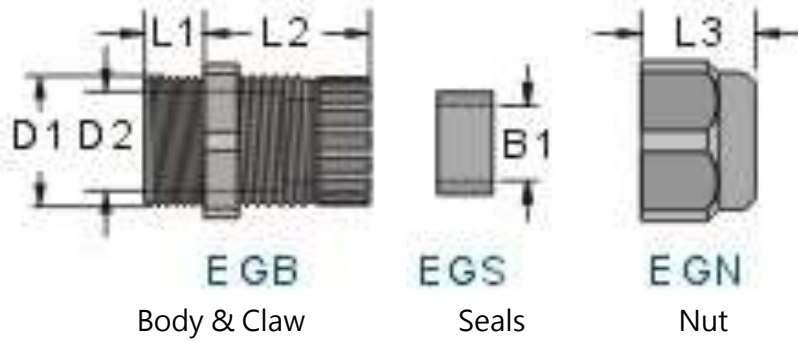

RS Article (will be replayed RS new article no.)	KSS Aricle NO	Thread Size	Mounting Hole	D1	D2	B1	L1	L2	L3	Cable Range	Packing
4442600	EGL7LSGY3-5	PG7	12.5~12.8	12.5	8.3	6.9	7.9	20	13.3	3.5~6	5PCS/BG
4442616	EGRNL9GY3-5	PG9	15.2~15.5	15.2	10.5	8	8.2	22	15.1	4~8	
4442622	EGRNL11GY3-5	PG11	18.3~18.9	18.3	13.2	10.5	7.9	23.7	18.3	5~10	
4442638	EGL135GY3-5	PG13.5	20.4~20.7	20.4	15.5	12	8.9	24.6	18.9	6~12	
4442650	EGRNL16GY3-5	PG16	22.5~22.8	22.5	17.2	14	9.8	26.2	19.5	10~14	
4442666	EGRNL21GY3-5	PG21	28.3~28.7	28.3	22.4	18.4	10.8	30	23.7	13~18	
4442672	EGRNL29GY3-5	PG29	37.0~37.4	37	30.6	25	10.8	35	27.4	18~25	

Protection : IP68 (only if the washer is assembled)

** PG THREAD (DIN STANDARD)

