

# Product Environmental Profile

## XB4 Pilot Light




## General information

Reference product	XB4 Pilot Light - XB4BVB3
Description of the product	The function of complete pilot light unit is to provide signal when receive rated voltage input.
Functional unit	XB4 plain lens modular green pilot light is supplied with 24V AC/DC, uses an integral LED. It has a metal bezel. This pilot light, designed to last without maintenance for a bright indication of process and machine operations, is easily installed into standard 22mm diameter cut-outs and connected with simple screw-clamp connections. It is clearly distinguishable visually at a distance thanks to a bright and long lasting LED illumination. This pushbutton power consumption is 0.432W with 71% active mode for 10 years, and it product complies with IEC 60947-1 standards..

## Constituent materials

Reference product mass	82.4 g including the product, its packaging and additional elements and accessories
------------------------	---

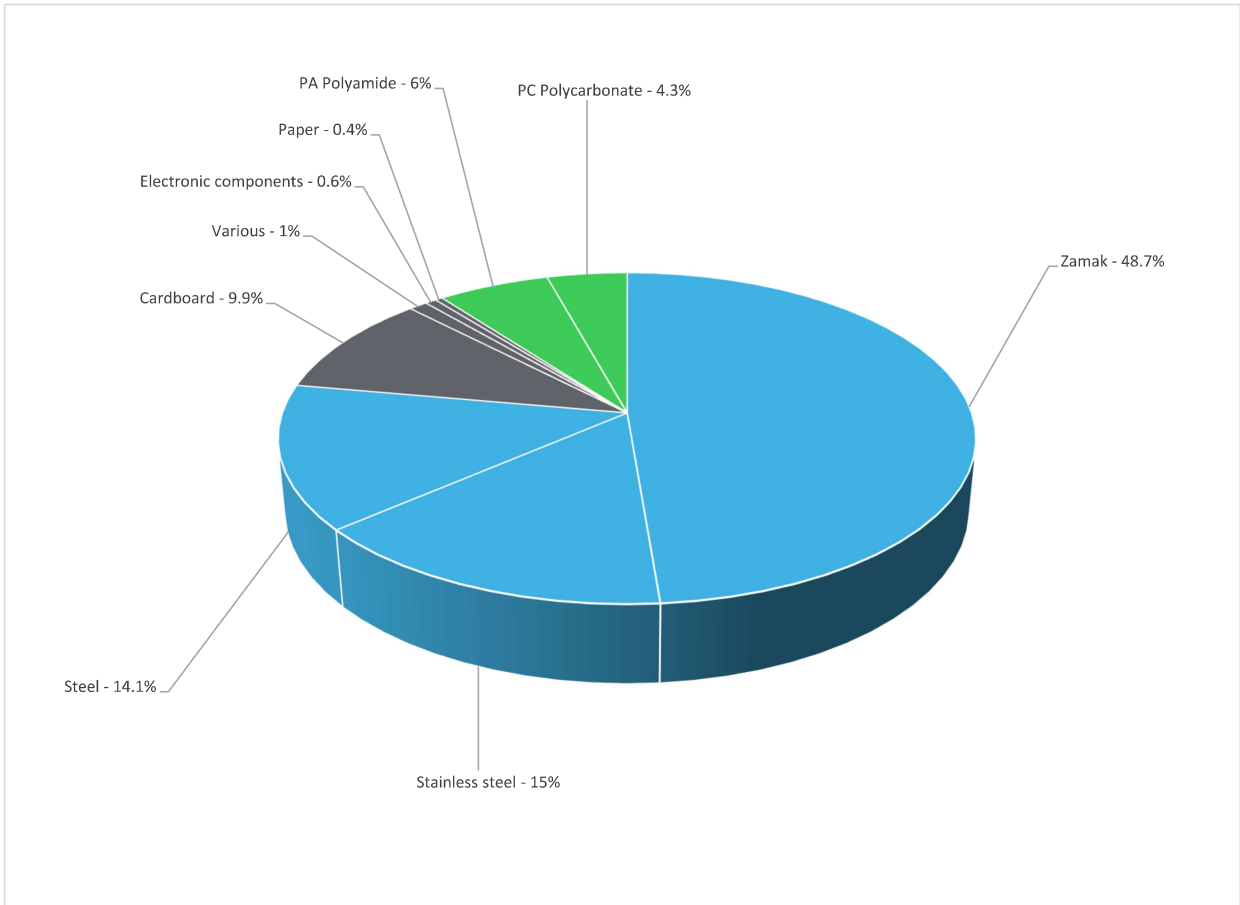

Plastics	10.30%
Metals	77.80%
Others	11.90%

## Substance assessment

Details of ROHS and REACH substances information are available on the Schneider-Electric Green Premium website <https://www.se.com/ww/en/work/support/green-premium/>

## Additional environmental information

<b>End Of Life</b>	Recyclability potential:	<b>85%</b>	Recyclability rate has been calculated based on REEECY'LAB tool developed by Ecosystem, for components/materials not covered by the tool, data from the "ECO'DEEE recyclability and recoverability calculation method" was taken. If no data was found a conservative assumption was used (0% recyclability).
--------------------	--------------------------	------------	---

## Environmental impacts

<b>Reference service life time</b>	10 years			
<b>Product category</b>	Other equipments - Active product			
<b>Installation elements</b>	No special installation components need during installation phase, but transport of packaging to disposal, and disposal of packaging accounted for during installation.			
<b>Use scenario</b>	The product is in active mode 71% of the time with a power use of 0.432W and off mode 29% of the time with a power use of 0 W for 10 years			
<b>Technological representativeness</b>	The Modules of Technologies such as material production, manufacturing process and transport technology used in this PEP analysis (LCA-EIME in this case) are similar and representative of the actual type of technologies used to make the product.			
<b>Geographical representativeness</b>	Global			
<b>Energy model used</b>	[A1 - A3]	[A5]	[B6]	[C1 - C4]
	Electricity Mix; Production mix; Low voltage; UE-27	Electricity Mix; Production mix; Low voltage; UE-27	Electricity Mix; Production mix; Low voltage; UE-27	Electricity Mix; Production mix; Low voltage; UE-27
		Electricity Mix; Production mix; Low voltage; APAC	Electricity Mix; Production mix; Low voltage; APAC	Electricity Mix; Production mix; Low voltage; APAC
		Electricity Mix; Production mix; Low voltage; US	Electricity Mix; Production mix; Low voltage; US	Electricity Mix; Production mix; Low voltage; US
		Electricity Mix; Production mix; Low voltage; RU	Electricity Mix; Production mix; Low voltage; RU	Electricity Mix; Production mix; Low voltage; RU
		Electricity Mix; Production mix; Low voltage; BR	Electricity Mix; Production mix; Low voltage; BR	Electricity Mix; Production mix; Low voltage; BR

Detailed results, including all the optional indicators mentioned in PCRred4, and the split of the Use Phase (B1 to B7), are available in the LCA report and on demand in a digital format - Country Customer Care Center - <http://www.schneider-electric.com/contact>

Mandatory Indicators			XB4 Pilot Light - XB4BVB3					
Impact indicators	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life	Loads and Benefits
			[A1 - A3]	[A4]	[A5]	[B1 - B7]	[C1 - C4]	[D]
Contribution to climate change	kg CO2 eq	1.34E+01	6.18E-01	1.08E-02	1.53E-02	1.25E+01	2.05E-01	-3.08E-01
Contribution to climate change-fossil	kg CO2 eq	1.33E+01	6.16E-01	1.08E-02	1.46E-02	1.25E+01	2.05E-01	-3.06E-01
Contribution to climate change-biogenic	kg CO2 eq	1.69E-02	2.28E-03	0*	6.78E-04	1.39E-02	4.84E-05	-1.17E-03
Contribution to climate change-land use and land use change	kg CO2 eq	1.27E-09	1.27E-09	0*	0*	0*	0*	0.00E+00
Contribution to ozone depletion	kg CFC-11 eq	2.52E-07	1.95E-07	0*	1.01E-09	5.49E-08	6.18E-10	-7.42E-08
Contribution to acidification	mol H+ eq	7.97E-02	5.20E-03	6.93E-05	6.06E-05	7.37E-02	6.40E-04	-1.71E-03
Contribution to eutrophication, freshwater	kg (PO4) <sup>3-</sup> eq	2.93E-05	4.58E-06	4.04E-09	1.10E-07	2.46E-05	4.76E-08	-8.88E-07
Contribution to eutrophication marine	kg N eq	9.34E-03	8.48E-04	3.25E-05	1.60E-05	8.32E-03	1.29E-04	-1.82E-04
Contribution to eutrophication, terrestrial	mol N eq	1.28E-01	9.20E-03	3.57E-04	1.21E-04	1.17E-01	1.23E-03	-2.01E-03
Contribution to photochemical ozone formation - human health	kg COVNM eq	3.04E-02	2.87E-03	9.02E-05	3.23E-05	2.70E-02	4.45E-04	-7.29E-04
Contribution to resource use, minerals and metals	kg Sb eq	5.34E-05	5.27E-05	0*	0*	7.15E-07	6.84E-09	-5.94E-05
Contribution to resource use, fossils	MJ	3.06E+02	9.83E+00	1.50E-01	1.59E-01	2.82E+02	1.32E+01	-5.08E+00
Contribution to water use	m3 eq	1.13E+00	2.82E-01	0*	6.52E-03	4.54E-01	3.86E-01	-1.35E-01

Additional indicators for the French regulation are available as well

Inventory flows Indicators		XB4 Pilot Light - XB4BVB3						
Inventory flows	Unit	Total	Manufact.	Distribution	Installation	Use	End of Life	Loads and Benefits
			[A1 - A3]	[A4]	[A5]	[B1 - B7]	[C1 - C4]	[D]
Contribution to use of renewable primary energy excluding renewable primary energy used as raw material	MJ	5.43E+01	0*	0*	1.14E-02	5.43E+01	0*	3.71E-02
Contribution to use of renewable primary energy resources used as raw material	MJ	1.64E-01	1.64E-01	0*	0*	0*	0*	-1.23E-01
Contribution to total use of renewable primary energy resources	MJ	5.44E+01	1.54E-01	0*	1.14E-02	5.43E+01	0*	-8.55E-02
Contribution to use of non renewable primary energy excluding non renewable primary energy used as raw material	MJ	3.05E+02	9.55E+00	1.50E-01	1.59E-01	2.82E+02	1.32E+01	-5.08E+00
Contribution to use of non renewable primary energy resources used as raw material	MJ	2.79E-01	2.79E-01	0*	0*	0*	0*	0.00E+00
Contribution to total use of non-renewable primary energy resources	MJ	3.06E+02	9.83E+00	1.50E-01	1.59E-01	2.82E+02	1.32E+01	-5.08E+00
Contribution to use of secondary material	kg	2.28E-05	2.28E-05	0*	0*	0*	0*	0.00E+00
Contribution to use of renewable secondary fuels	MJ	0.00E+00	0*	0*	0*	0*	0*	0.00E+00
Contribution to use of non renewable secondary fuels	MJ	0.00E+00	0*	0*	0*	0*	0*	0.00E+00
Contribution to net use of freshwater	m³	2.72E-02	6.57E-03	0*	1.52E-04	1.06E-02	9.91E-03	-3.13E-03
Contribution to hazardous waste disposed	kg	2.26E+00	1.93E+00	0*	0*	2.52E-01	7.58E-02	-4.52E+00
Contribution to non hazardous waste disposed	kg	2.31E+00	3.99E-01	3.78E-04	4.97E-02	1.86E+00	9.46E-03	-3.26E-01
Contribution to radioactive waste disposed	kg	4.73E-04	1.32E-04	2.69E-07	6.67E-06	3.32E-04	7.96E-07	-7.77E-05
Contribution to components for reuse	kg	0.00E+00	0*	0*	0*	0*	0*	0.00E+00
Contribution to materials for recycling	kg	7.08E-02	0*	0*	8.39E-03	0*	6.25E-02	0.00E+00
Contribution to materials for energy recovery	kg	0.00E+00	0*	0*	0*	0*	0*	0.00E+00
Contribution to exported energy	MJ	0.00E+00	0*	0*	0*	0*	0*	0.00E+00
Contribution to biogenic carbon content of the product	kg de C	0.00E+00	0*	0*	0*	0*	0*	0.00E+00
Contribution to biogenic carbon content of the associated packaging	kg de C	0.00E+00	0*	0*	0*	0*	0*	0.00E+00

\* represents less than 0.01% of the total life cycle of the reference flow

Life cycle assessment performed with EIME version v5.9.4, database version 2022-01 in compliance with ISO14044.

Detailed results, including all the optional indicators mentioned in PCR<sub>ed4</sub>, and the split of the Use Phase (B1 to B7), are available in the LCA report and on demand in a digital format - Country Customer Care Center - <http://www.schneider-electric.com/contact>

Please note that the values given above are only valid within the context specified and cannot be used directly to draw up the environmental assessment of an installation.

Registration number :	ENVPEP2308026_V2	Drafting rules	PEP-PCR-ed4-2021 09 06
Date of issue	01/2024	Supplemented by	PSR-0005-ed2-2016 03 29
		Information and reference documents	<a href="http://www.pep-ecopassport.org">www.pep-ecopassport.org</a>
		Validity period	5 years
Independent verification of the declaration and data, in compliance with ISO 14021 : 2016			
Internal	X	External	
The PCR review was conducted by a panel of experts chaired by Julie ORGELET (DDemain)			
PEP are compliant with XP C08-100-1 :2016 or EN 50693:2019			
The elements of the present PEP cannot be compared with elements from another program.			
Document in compliance with ISO 14021 : 2016 « Environmental labels and declarations. Type II environmental declarations »			

Schneider Electric Industries SAS  
 Country Customer Care Center  
<http://www.schneider-electric.com/contact>  
 35, rue Joseph Monier  
 CS 30323  
 F- 92500 Rueil Malmaison Cedex  
 RCS Nanterre 954 503 439  
 Capital social 928 298 512 €