

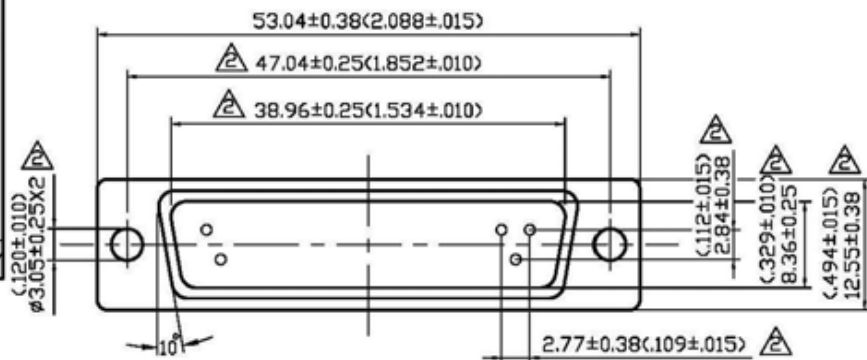


NO	DESCRIPTION	DATE
△	ADD MIS PART NO.	04.01.04
△	ADD DESCRIPTION 47.04±0.13 → 47.04±0.25 38.96±0.13 → 38.96±0.25 Ø3.05 → Ø3.05±0.25 8.36 → 8.36±0.25 12.55 REF. → 12.55±0.38 2.77 → 2.77±0.38 03.14.08 41.3 REF. → 41.28±0.38 1 → 0.76±0.25 (5.84) → 5.83±0.38 10.72 REF. → 10.72±0.38 11 REF. → 10.72±0.38 3.3 REF. → 2.7±0.5 2.84 → 2.84±0.38 TIN → GOLD MIS PART NO. → P/N	
△	GOLD	05.16.13



CONTACT TYPE
COLOR OF INSULATION
PLATING OF CONTACT
SOLDER TERMINATIONS
WORKING VOLTAGE
CONTACT RESISTANCE
MATING CYCLES
PLUG

MACHINED CONTACT
BLACK PBT GLASSFIBRE REINFORCED
△ GOLD
△ GOLD
500V AC AT SEA LEVEL
10m OHM MAX.
150 TIMES
DIMPLED

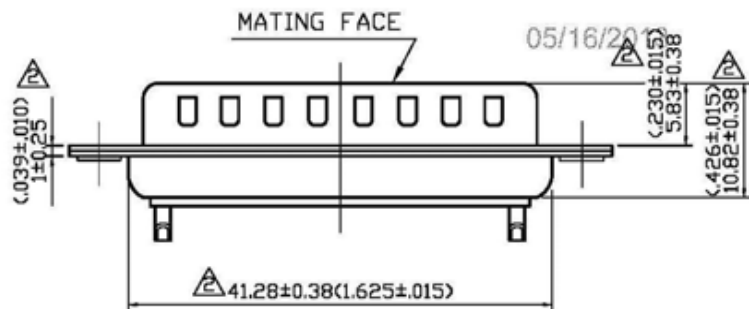

△△ P/N: 544-3812

APPROVED

by

DATE



DESCRIPTION		D-SUB WITH 25-PIN MALE CONNECTOR BY MACHINING						
製圖	DRAWN	TOLERANCE	品名	□50-0025P-M	日期	DATE	版次	REV.
檢圖	Yoko	.X ±0.2	TITLE	\ROHS COMPLIANT	02.23.95	02.23.95	A-3	
認	CHECK	.XX ±0.1	單位	mm(in)	DWG.NO.	55-0051		
定	Ivan	.XXX ±0.05	比例	SCALE				
	APPROVAL	ANGLE ±5°						
	Angela							