

Range datasheet


RS Pro Anti-Vibration Rubber Feet



Product Details -

Suitable for isolating vibration from heavy machinery and also acts as a levelling device for un-even flooring. Also available with stainless steel metal parts for use with food industry machinery, on special request

Line Drawing

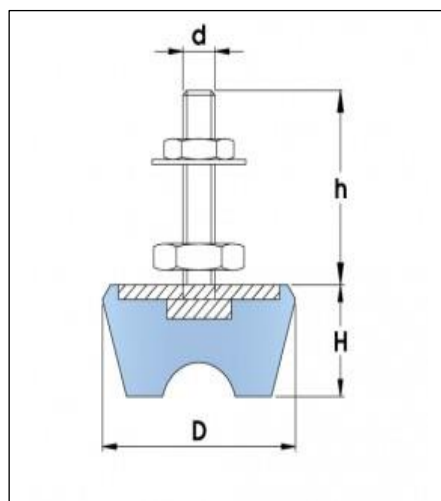



Range Table:

RS Stock number	Diameter (D) mm	Height(H) mm	Stud (dxh) mm	Maximum Static Load Rating (kg)	Rubber Hardness (ShA)
1263899	48	23	M8x40	10-80	65
1263898	60	25	M10x60	50-120	65
1265970	90	33	M12x120	120-300	75
1263901	105	38	M16x125	250-500	65
1266366	125	45	M16x110	400-800	70
1266367	170	57	M20x170	1000-1600	70
1263900	187	70	M20x115	1400-2400	75
1263559	210	75	M20x100	2000-3500	75

Rubber- Natural Rubber

Metal- Zinc passivated mild steel

