
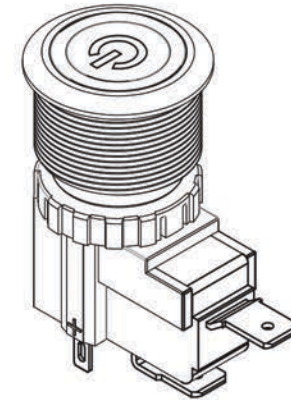


MATERIAL:
 BUSHING: Stainless Steel.
 BASE: PBT(UL 94-V0) ; PC(UL94-V2) ; PA6T(UL94-V0)
 ACTUATOR: PC(UL 94-V2);Stainless Steel.
 INNER ASSEMBLY: POM/PA66
 SPRING: Steel.
 SEALING: Silicone.
 O-Ring: Silicone.
 TERMINAL/CONTACT: Brass, Silver plated.
 HEX NUT : Nickel plated brass.
 RoHS

Body type: Stainless
 Button type: Flat
 Operating type: Lock
 Light type: Ring + Power logo
 LED color: White

LED voltage: 24 V
 Micro-switch type: Standard
 Current Rating: 26 A
 Connect forms: SPST-NC

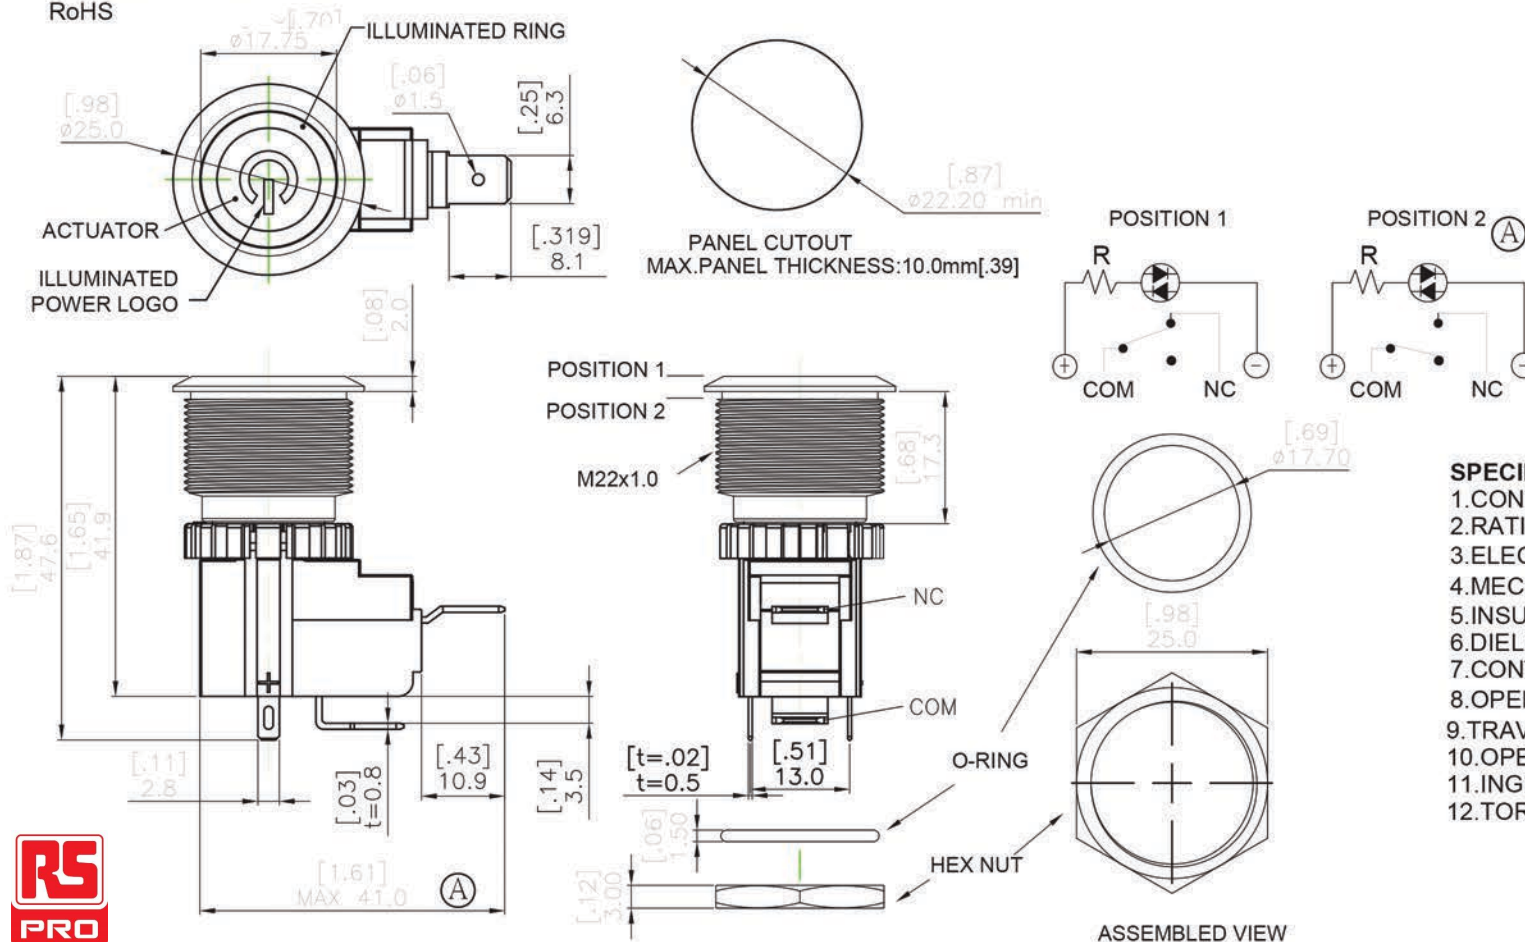

SPECIFICATIONS

- 1.CONTACT MATERIAL: SILVER
- 2.RATING: 26A 250/125VAC.
- 3.ELECTRICAL LIFE: 26A /125&250VAC 10,000 CYCLES
- 4.MECHANICAL LIFE: SELF-LOCK 500,000.
- 5.INSULATION RESISTANCE:100M Ω MIN AT 500VDC .
- 6.DIELECTRIC STRENGTH: 1,500V RMS@sea level.
- 7.CONTACT RESISTANCE: 50m Ω MAX.@1A 12VDC(initial value).
- 8.OPERATING TEMPERATURE: -25 $^{\circ}$ C to 85 $^{\circ}$ C
- 9.TRAVEL: ABOUT 3.2mm.
- 10.OPERATION PRESSURE: 3.5 \pm 1.5N
- 11.INGRESS PROTECTION: IP67,IK08(Stainless Steel).
- 12.TORQUE: 1~3Nm.