


Datasheet

Push-in Screw Terminal Blocks

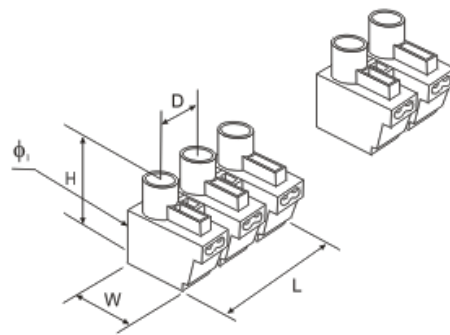

RS CODE	POLE	WIRE RANGE	SCREW SIZE	RATED VOLTAGE	DIMENSIONS (mm)				
					W	L	Φ1	D	H
1367888	2 POLES	2.5~ 6.0 mm <sup>2</sup>	M3.0	380V	19.3	17.3	4.5	10	19
1367889	3 POLES	2.5~ 6.0 mm <sup>2</sup>	M3.0	380V	19.3	27.2	4.5	10	19

**Cross Section:** rated for rigid wire and cables (if for flexible wire, it should be reduced one-step, i.e. 6mm<sup>2</sup> is 4mm<sup>2</sup>)

**HOUSING:** POLYAMIDE (PA 66)

**INSERTS:** ZINC PLATED STEEL

**SCREWS:** GALVANISED STEEL

**CLAMPING:** ZINC PLATED STEEL

**WORKING TEMP.:** -40 ~ + 110°C

**COLOUR:** WHITE

**STANDARD:** CE (BS EN 60998)

**FEATURES:** QUICK WIRING CONNECTION; FLAME RETARDANT;  
ALL SCREWS ARE CAPTIVE & RAISED FOR EASY WIRING.