



Datasheet

RS PRO 2.5m D25 F & D 9 F to D25 F & D9 F Cable


Stock number: 182-8825

EN

Our RS PRO 2.5m D25 female & D9 female to D25 female & D9 female has a grey PVC cable flex.

The connector hoods are made from grey PVC and have a strain relief on the end of the hood to support the cable and to stop the cable from splitting around the hood.

The cable flex has an outer diameter of 4mm and 28awg, the connectors have gold flash pins to help stop corrosion.

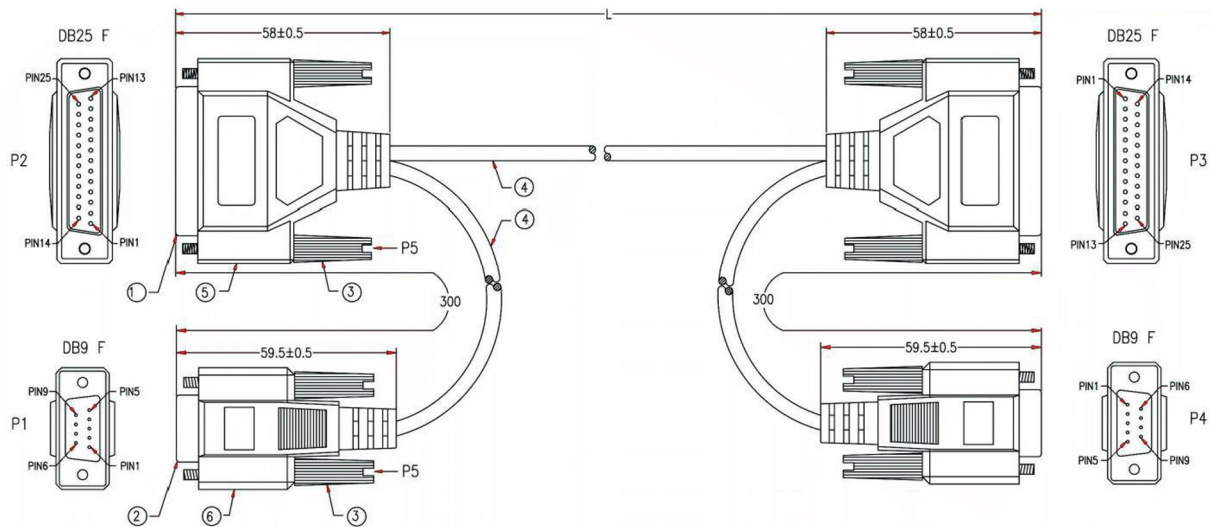

P1	P2	P3	P4
3	2	3	2
2	3	2	3
7	4	5	8
8	5	4	7
6	6	20	4
5	7	7	5
4	20	6	6
SHIELD	SHIELD	SHIELD	SHIELD

6	BLACK PVC TUBE $\phi 3.0 \times 22\text{mm}$
	ALUMINUM FOIL 33*65mm
	MOLDED PE COLOR TRANSPARENT
5	MOLDED PVC GREY
	BLACK PVC TUBE $\phi 3.0 \times 30\text{mm}$
	ALUMINUM FOIL 33*110mm
4	MOLDED PE COLOR TRANSPARENT
	MOLDED PVC GREY
4	NON-UL 7C 28AWG, ALUM-MYLAR FOIL SHIELDING WITH DRAIN WIRE, OD 4.0mm, JACKET GREY
3	MOLDED THUMBSCREW #4-40, LENGTH 46.5mm, GREY
2	DB9 FEMALE, GOLD FLASH ON CONTACTS, BLUE INSULATOR
1	DB25 FEMALE, GOLD FLASH ON CONTACTS, BLUE INSULATOR

RoHS / REACH / CE