


Digital Moisture Meter

Taishio

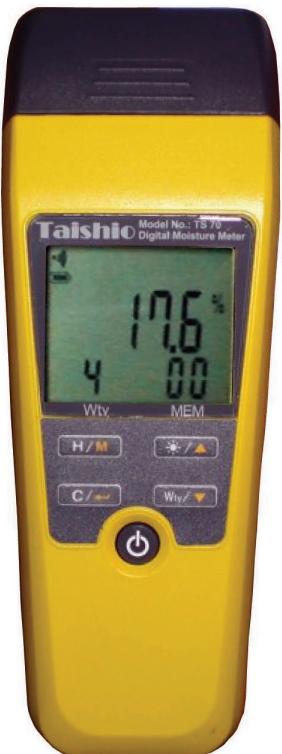

Features

- Digital LCD display with luminescent back-light
- Aesthetics protection cap for safe carrying and operating
- Abrasion- proof, hardened gloss treatment on display- window for long term protection
- 5.5% to 99.9% moisture range with DC 0-1V output
- Stores up to 99 readings, MIN/MAX/ Average values recalled
- Auto temperature compensation and internal calibration
- Auto Power off and low battery warning (with audible)
- Ergonomic design, easy operation, comfortable and durable
- CD and RoHS approved

SPECIFICATIONS

Measuring range:	5.5 to 99.9% H2O% WME
Resolution	0.1%
Accuracy (at 25 °C)	± 1% Wood scale
Display	Digital dual LCD display, with multi-function indicator
Sampling	0.3 seconds
Wood group scales	Select from 9 wood groups
Data memory	99 readings
Signal output	Analog DC 0 - 1v (10mV/ 1%), load >500Ω
Calibration	Built-in calibration adjustment
Functions	Back-Light luminescence EL Data-Hold, Records Max./Min and Average Values Manual/ automatic power off Automatic temperature compensation Battery symbol and low power warning. (with audible) Usable and changeable of extension probe
Power	One 9 V (6F22) Battery, about 250 hours for continuing use (None back light)
Operating	-20°C to 55°C, <90% RH, non-condensing
Dimensions	153 x 56 x32 mm (6.0" x 2.2" x 1.26")
Weight	155g. including battery

MODEL	DESCRIPTION
TS 70K	Digital Moisture Meter Kit include standard probe, roller probe and carrying case

Temperature

Calibrator

Pressure

Humidity

Recorder &
Dataloggers

Air Flow

Level & Flow

Portable
Instruments

EX Proof / IS

Environment