



ENGLISH


Datasheet

New 5.0mm Plug Straight 15A 2 way

RS Stock 874-4773



Dimensions: (mm)

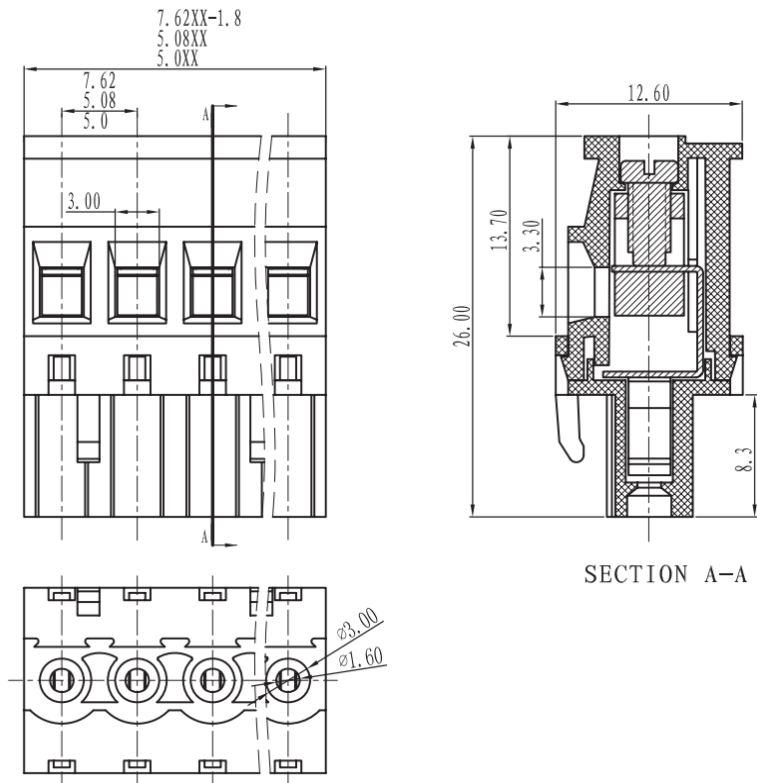



ENGLISH

Specifications

Electrical

Standard: UL IEC
Rated voltage: 300V 320V
Rated current: 15A 20A
Contact resistance: $20\text{m}\Omega$
Wire range: 28-14AWG 2.5mm^2
Withstanding voltage: AC2000V/1Min
Insulation resistance: $500\text{M}\Omega$ /DC500V

Mechanical

Temp.Range: $-40^{\circ}\text{C}\sim+105^{\circ}\text{C}$
Torque: 0.5Nm ($4.51\text{lb}\cdot\text{in}$)
Strip length: 7-8mm

Dimensions

Pitch: 5.0mm, 5.08mm, 7.62mm
Poles: 02P-24P

Material

Housing: PA66, UL94V-0
Screws: M3, steel Zinc plated
Clamp: Brass, Ni plated
wire guard: Phosphor bronze, Ni plated