


NO	DESCRIPTION	DATE
①	BACKGROUND FORMAT UPDATED	12.26.03'
②	ADD REF ; Ø5.4 BACKGROUND FORMAT UPDATED	08.09.11'
③	DEL PROOF VOLTAGE WORKING VOLTAGE VOLTAGE RATING 8.5 → 6.5	05.09.13'

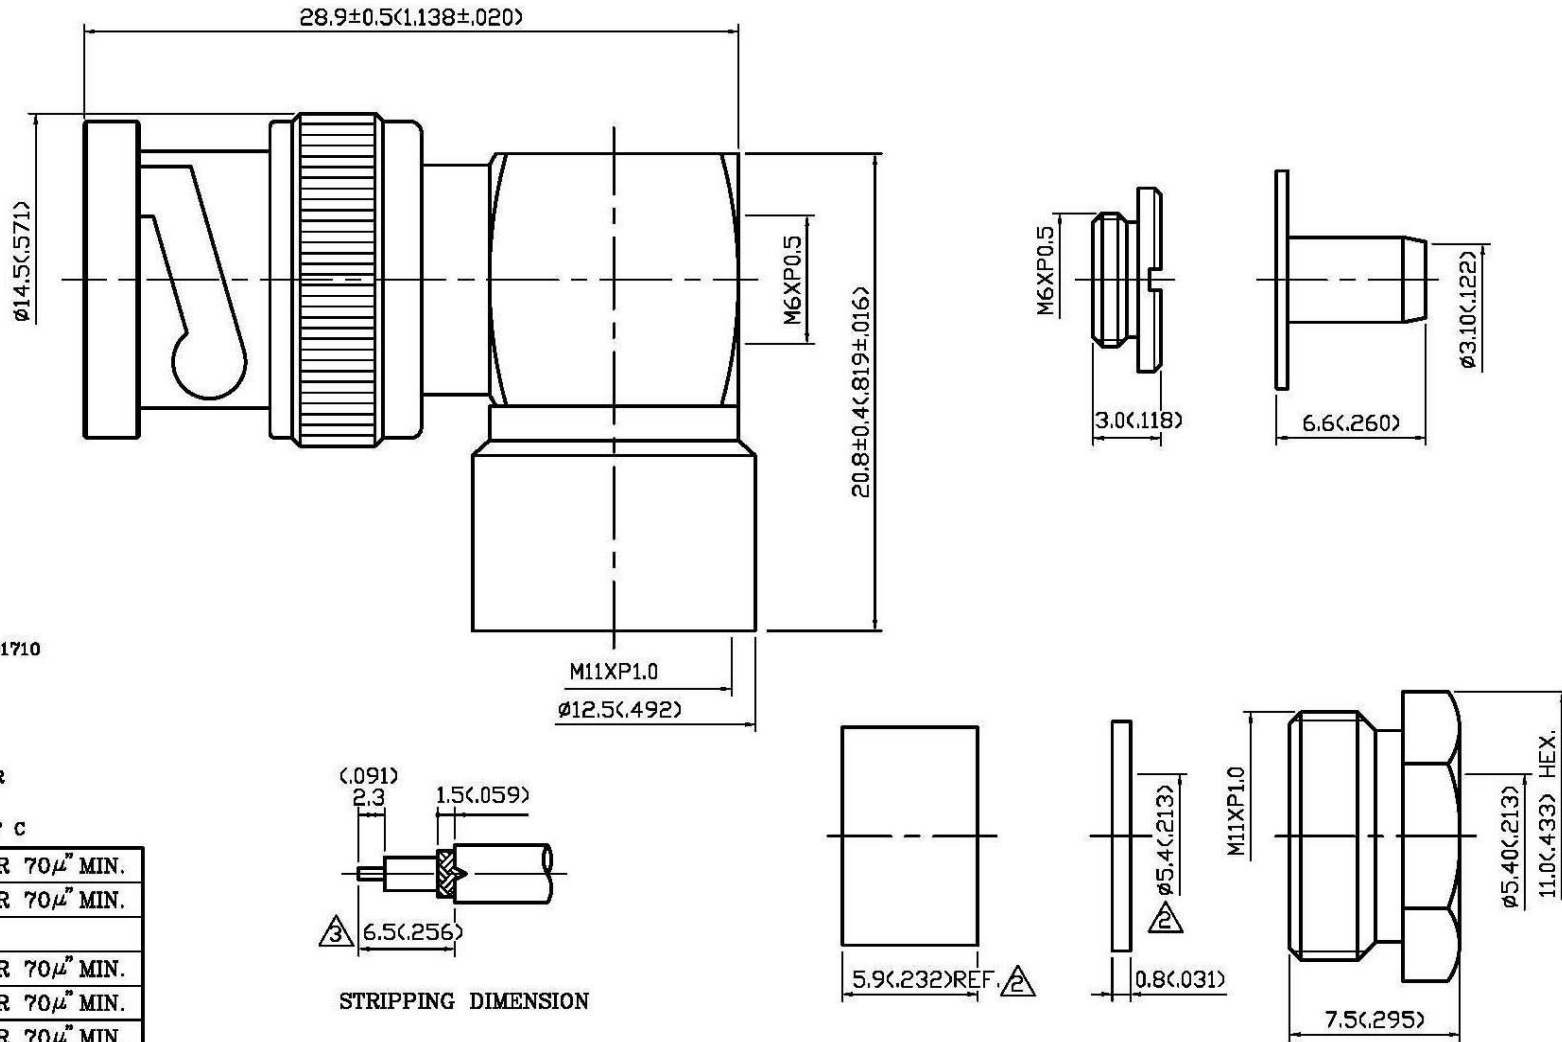

**1.0 ELECTRICAL**

- 1.1 FREQUENCY RANGE: DC-4 GHz
- 1.2 NOMINAL IMPEDANCE: 50 OHMS
- 1.3 VOLTAGE RATING: 500 VOLTS MAX. ③

**2.0 MATERIALS**

- 2.1 BODIES: BRASS PER JIS-C3604
- 2.2 CENTER CONTACT: BRASS PER JIS-C3604
- 2.3 INSULATION: TEFLON PER ASTM D1457 AND ASTM D1710

**3.0 FINISHES AND OTHERS**

- 3.1 SEE BELOW TABLE FOR DETAILS.

**4.0 MECHANICAL**

- 4.1 FOR USE WITH RG58U OR SIMILAR STYLE CABLE
- 4.2 CABLE ATTACHMENT: OUTER: CLAMP, INNER: SOLDER

**5.0 ENVIRONMENTAL**

- 5.1 OPERATING TEMPERATURE RANGE: -85° C TO +185° C

15	NUT II	BRASS	1	SILVER 70μ" MIN.
14	WASHER	BRASS	1	SILVER 70μ" MIN.
13	GASKET	SILICONE	1	RED
12	BRAID CLAMP	BRASS	1	SILVER 70μ" MIN.
11	CHASSIS	BRASS	1	SILVER 70μ" MIN.
10	NUT I	BRASS	1	SILVER 70μ" MIN.
9	BODY II	BRASS	1	SILVER 70μ" MIN.
8	CENTER CONTACT	BRASS	1	SILVER 70μ" MIN.
7	BODY I	BRASS	1	SILVER 70μ" MIN.
6	WASHER	BRASS	1	SILVER 70μ" MIN.
5	SPRING WASHER	SK-5	1	NICKEL
4	WASHER	BRASS	1	NICKEL
3	GASKET	SILICONE	1	RED
2	INSULATION	TEFLON	1	NONE
1	SHELL	BRASS	1	SILVER 70μ" MIN.
NO	DESCRIPTION	MATERIAL	Q'TY	FINISH

STRIPPING DIMENSION

APPROVED

by \_\_\_\_\_ DATE: \_\_\_\_\_



DESCRIPTION		BNC RIGHT ANGLE PLUG CLAMP								
製圖	DRAWN Kristina	TOLERANCE	品名	13-06-2	T.S.S	58U	日期	DATE	版次	REV.
檢圖	CHECK Arc	.X ±0.2	TITLE	ROHS COMPLIANT (<500)			01.20.00	1	A-3	
認定	APPROVAL Angela	.XX ±0.1	單位	mm(in)	DWG.NO.	13-0508		5464364		
	ANGLE ±5°	.XXX ±0.05	比例	4:1						