



# Data Sheet

**DIN rail mount THREE PHASE SUPPRESSOR**  
**RS Stock No: 240-400**

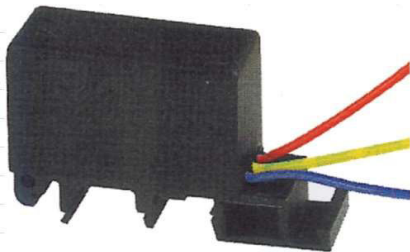

## Circuit Diagram DELTA Construction

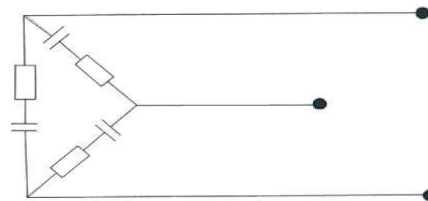

These resistor capacitor suppressors are designed to reduce contact arcing where inductive loads are involved, thereby increasing the life of their contacts.

The unit is designed for power applications with delta connections, for 3 - phase uses, and displays a high degree of reliability in various types of high voltage equipment.

Specification	
Capacitance	199 nF x 3
Capacitance Tolerance	± 10 %
Resistors	1000 Ohm ± 5% 3.5 Watt
Operating Voltage	500 V RMS (Max)
Supply Frequency	50 / 60 Hz
Operating Temperature	
Insulation Resistance	100 MΩ 500 V
Approvals	BS, EN, ISO 9001-2008

Din Rail Mounting:  
 Top Hat (EN50022, DIN46277-3 BS5584)

G. Profile (EN50035, DIN46277-1 BS5825)