


Automotive Fuses

Micro

multicomp PRO


**RoHS
Compliant**

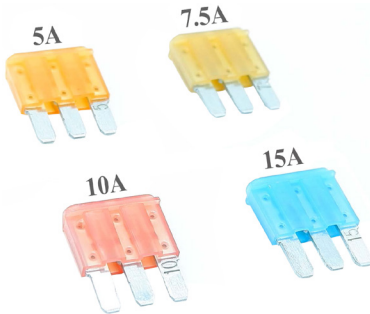

Specification

Voltage Rating	: 32V DC
Interrupting Ratings	: 1000A @ 32V DC
Operating Temperature Range	: -40°C to + 125°C
Body	: PA66.

Diagram

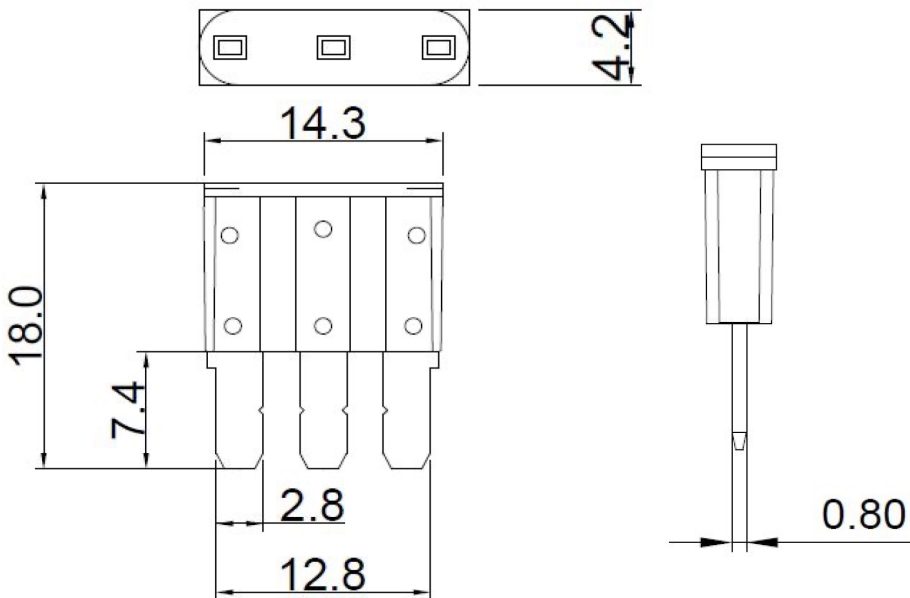

Time-Current Characteristics

% of Rating	Opening Time (Min/Max)
110	100 h/-
135	0.75 sec / 120 sec
169	0.3 sec / 50 sec
200	0.15 sec / 5 sec
350	0.04 sec / 0.5 sec
600	0.02 sec / 0.1 sec


Newark.com/multicomp-pro
Farnell.com/multicomp-pro
sg.element14.com/b/multicomp-pro

multicomp PRO


Automotive Fuses

Micro

Time-Current Characteristic curves

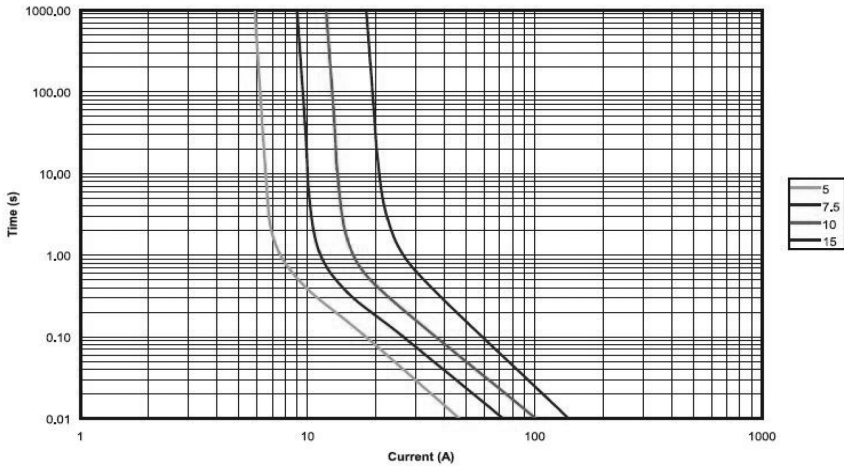

Temperature Derating Curve

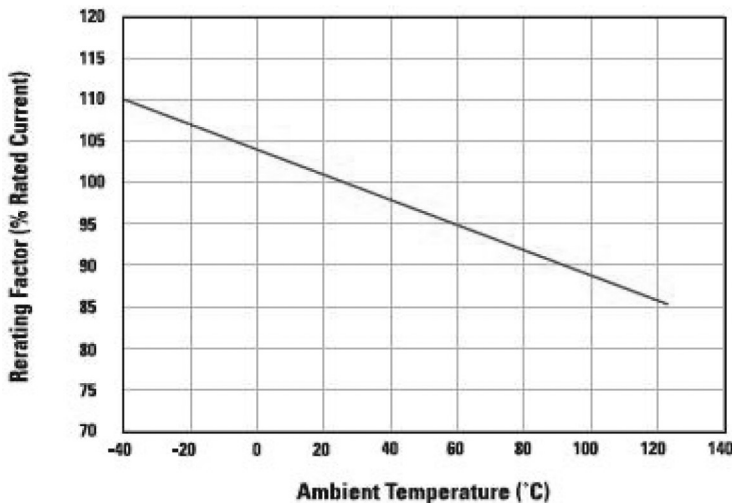

Part Number Table

Description	Ampere (A)	Voltage(V DC)	Color Code	Part Number
Micro Fuse	5A	32V	Tan	MP012587
	7.5A		Brown	MP012588
	10A		Red	MP012589
	15A		Blue	MP012590

Important Notice : This data sheet and its contents (the "Information") belong to the members of the AVNET group of companies (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. Multicomp Pro is the registered trademark of Premier Farnell Limited 2019.