

## **Features**

- Push-pull latching system
- Chrome plated Brass
- IP68
- 360° Screening for full EMC shielding

## **RS PRO Industrial Circular Connectors**

RS Stock No.: 2406581



RS PRO is the own brand of RS. The RS PRO Seal of Approval is your assurance of professional quality, a guarantee that every part is rigorously tested, inspected, and audited against demanding standards. Making RS PRO the Smart Choice for our customers.



#### **Product Description**

RS Pro's range of waterproof Chrome plated Brass push-pull locking connectors offer exceptional quality that is found in many cutting-edge connectors, including an IP68 rating and full 360° EMC shielding with a high mating life. As has become standard within the RS Pro brand you can expect high quality products but at a reasonable price. These connectors are ideal for use in medical devices, testing equipment, audio equipment and other high-end applications.

#### **General Specifications**

Number of Contacts	3
Housing Material	Chrome Plated Brass
Contact Material	Brass
Contact Plating	Gold
Contact Gender	Male
Mating Type	Cable Mount
Body Orientation	Straight
Contact Carrier	PPS
Mating Cycles	>5,000
Colour	Natural
Application	Instrumentation, Process control, Robotics, Assembly lines and manufacturing, Factory automation, Industrial production and automation, Medical devices

#### **Electrical Specifications**

Plug/Socket	Socket
Current Rating	18A
Test Voltage Contact-Shell k/vAC	1.60
Test Voltage Contact – Contact k/v AC	2.0

#### **Mechanical Specifications**

Connector Size	2F
Termination Method	Solder
Mounting Type	Panel Mount
Cable Outer Diameter	6.7



### **Operation Environment Specifications**

Operating Temperature -55°C to +250°C

### **Protection Category**

IP Rating IP68

### **Approvals**

Compliance/Certifications RoHS, CE

### FOR MATING PARTS, SEE MATRIX:




#### **RM-F Series 2F**

Plug Cable End			Panel Mount				In-Line Cable End		
No. of Contacts	Gender	Mates With	RS Stock No.	No. of Contacts	Gender	Or	RS Stock No.	No. of Contacts	Gender
2	Male		2406427	2	Female		2406511	2	Female
3	Male		2406428	3	Female		2406512	3	Female
4	Male		2406429	4	Female	40	2406513	4	Female
6	Male		2406430	6	Female		2406514	6	Female
8	Male		2406431	8	Female		2406515	8	Female
1+8	Male		2406432	1+8	Female		2406516	1+8	Female
16	Male		2406433	16	Female		2406518	16	Female
19	Male	#7	2406434	19	Female	0.0	2406519	19	Female
	No. of Contacts  2  3  4  6  8  1+8  16	No. of Contacts Gender  2 Male 3 Male 4 Male 6 Male 8 Male 1+8 Male 16 Male	No. of Contacts	No. of Contacts Gender  2 Male With 2406427  3 Male " 2406428  4 Male " 2406428  6 Male " 2406430  8 Male " 2406431  1+8 Male " 2406432  16 Male " 2406433	RS Stock No.   No. of Contacts   Stock No.   No. of Contacts	No. of Contacts         Gender         Mates With         RS Stock No.         No. of Contacts         Gender           2         Male         2406427         2         Female           3         Male         2406428         3         Female           4         Male         2406429         4         Female           6         Male         2406430         6         Female           8         Male         2406431         8         Female           1+8         Male         2406432         1+8         Female           16         Male         2406433         16         Female	No. of Contacts   Gender   Mates   With   2406427   2   Female   Or	No. of Contacts         Gender         RS Stock No.         No. of Contacts         Gender         RS Stock No.           2         Male         2406427         2 Female         Or 2406511           3         Male         2406428         3 Female         2406512           4         Male         2406429         4 Female         2406513           6         Male         2406430         6 Female         2406514           8         Male         2406431         8 Female         2406515           1+8         Male         2406432         1+8 Female         2406516           16         Male         2406433         16 Female         2406518	No. of Contacts         Gender         RS Stock No.         No. of Contacts         Gender         RS Stock No.         No. of Contacts           2         Male         2406427         2 Female         Or 2406511         2           3         Male         2406428         3 Female         2406512         3           4         Male         2406429         4 Female         2406513         4           6         Male         2406430         6 Female         2406514         6           8         Male         2406431         8 Female         2406515         8           1+8         Male         2406432         1+8 Female         2406516         1+8           16         Male         2406433         16 Female         2406518         16

The RS PRO Seal of Approval is only awarded after a rigorous quality process to demanding international standards.





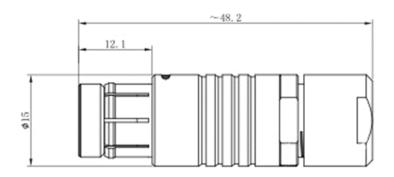

















2(\$1.6)

3(\$1.6)

 $4(\phi 1, 3)$ 

3)

6 (Ø0.9)

8 (\$0.9)

16 (\$0.7)

19 (\$0.7)

26 (\$0.5)