

## Datasheet

# RS PRO UL1015 Green/Yellow, 2.1 mm<sup>2</sup> Hook Up Wire, 305m

Stock No: 8425561



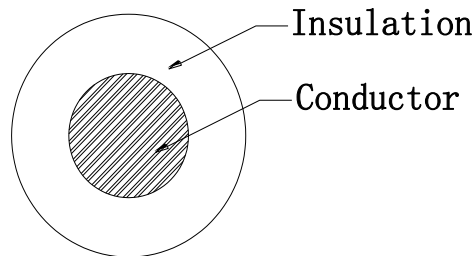
## Technical Specifications:



Conductor	Tinned Copper
Cores Number	1C
Size(AWG)	14AWG
Construction( $\pm 0.008$ mm)	41/0.25
Stranded Dia.(mm)	1.88
Insulation Material	PVC
Insulation Color	Green/Yellow
Ave Thickness(mm)	0.81
Min Thickness(mm)	0.61
Insulation Dia.( $\pm 0.10$ mm)	3.51

## Features & Benefits:

- **Temperature Range: -40 to 105 °C**
- **Conductor resistance(20°C Ω/km): 9.18Max.**
- **Insulation DC Resistance(20°C MΩ\*Km): 200Min.**
- **Rated Voltage: 300V**

## Cross Section drawings



**Cable Marking:** E254881  AWM STYLE 1015 14AWG  
105°C 600V VW-1 C  AWM I A 105°C 600V FT1 -LF- -F-  
ELETECK

**Applications:** Hook up wire can be used for a broad range of applications, whether that be in a control cabinet, high-temperature oven, or in a specialised machine tool.