



MASTER PL-L 4 Pin

MASTER PL-L 36W/840/4P 1CT/25

Energy-saving compact fluorescent lamps. Compact long-arc low-pressure mercury discharge lamp. Envelope consists of 2 parallel fluorescent tubes

Warnings and Safety

- Lamp light technical and electrical characteristics are influenced by operating conditions, i.e. lamp ambient temperature and operating position as well as applied control gear
- Lamp light technical and electrical characteristics are influenced by operating conditions, i.e. lamp ambient temperature and operating position as well as applied control gear
- Shorter lamp life when often switching and not well pre-heated electrodes
- · Shorter lamp life when often switching and not well pre-heated electrodes
- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.
- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

Product data

General Information	
Flux measurement reference	Sphere
Cap-Base	2G11 [2G11]
Light Technical	
Color Code	840 [CCT of 4000K]
Luminous Flux	2,850 lumen
Color Designation	Cool White (CW)
Chromaticity Coordinate X (Nom)	0.38
Chromaticity Coordinate Y (Nom)	0.38
Correlated Color Temperature (Nom)	4000 K

Luminous Efficacy (rated) (Nom)	81 lm/W	
Color rendering index (CRI)	80	
Operating and Electrical		
Power Consumption	36.3 W	
Lamp Current (Nom)	0.435 A	
Controls and Dimming		
Dimmable	Yes	


Datasheet, 2023, April 15 data subject to change

MASTER PL-L 4 Pin

Approval and Application		
Energy Efficiency Class	G	
Mercury (Hg) Content (Max)	2 mg	
Mercury (Hg) Content (Nom)	2.0 mg	
Energy Consumption kWh/1000 h	37 kWh	
EPREL Registration Number	423271	
Product Data		
Full product code	871150070675140	

Order product name	MASTER PL-L 36W/840/4P 1CT/25
Order code	927903408470
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	25
Material number (12NC)	927903408470
Full product name	MASTER PL-L 36W/840/4P 1CT/25
EAN/UPC - Case	8711500711014


Dimensional drawing



 Product
 D (max)
 D1 (max)
 A (max)
 B (max)
 C (max)

 MASTER PL-L 36W/840/4P 1CT/25
 39.0 mm
 18.0 mm
 384.2 mm
 410 mm
 416.6 mm

Photometric data

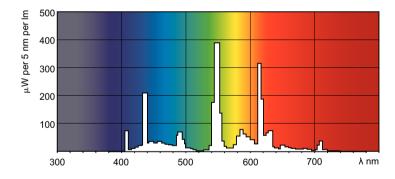

Spectral Power Distribution Colour - MASTER PL-L 36W/840/4P 1CT/25



© 2023 Signify Holding All rights reserved. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify. Philips and the Philips Shield Emblem are registered trademarks of Koninklijke Philips N.V.