

Datasheet

Stock No: 8744812




# RS Pro Straight Terminal Block, Plug, 4 Pole, 5.08mm Pitch

- 300V 15A UL
- UL94-V0
- PA66
- 5.00mm (5.08mm) Pin Pitch
- RoHS Compliant



**Technical Data**

<b>Pitch</b>	5.00mm (5.08mm)
<b>UL Rating</b>	300V 15Amps
<b>IEC Rating</b>	450V 20Amps
<b>Solder Pin</b>	n/a
<b>Wire Range</b>	28-14AWG (2.5mm <sup>2</sup> )
<b>PCB Hole Diameter</b>	n/a
<b>Screw</b>	M3.0 Steel (Zinc Plate)
<b>Screw Torque</b>	0.5Nm
<b>Insulation Voltage</b>	AC2000V / 1 Min
<b>Initial Contact Resistance</b>	20mΩ
<b>Insulation Resistance</b>	500MΩ / DC500V
<b>Temperature Range</b>	-40 to +105°C
<b>Max Soldering</b>	n/a

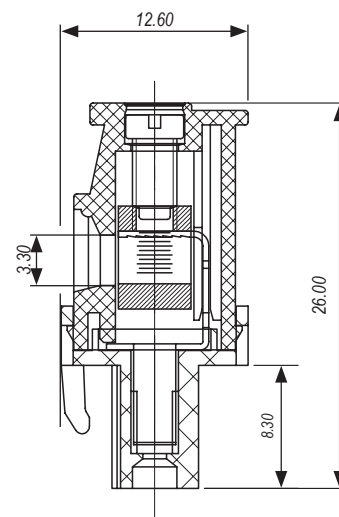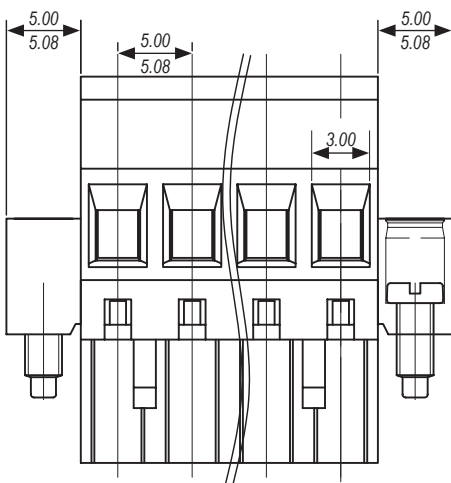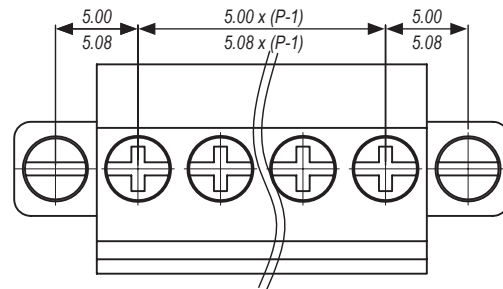

Dimensions shown in mm