





Series 03 | One-piece, non snap-open e-chain®


| e-chain® non snap-open | <i>Bi</i> [mm] | <i>Ba</i> [mm] | <i>R</i> Bending radii [mm] | Weight [kg/m] |
|---------------------------|-------------------|-------------------|--------------------------------|------------------|
| 03. 05 .R.0 | 5 | 8,7 | 010 012 015 018 028 | ≈ 0,04 |
| 03. 07 .R.0 | 7 | 10,7 | 010 012 015 018 028 | ≈ 0,05 |
| 03. 10 .R.0 | 10 | 13,7 | 010 012 015 018 028 | ≈ 0,06 |

Supplement Part No. with required radius (*R*). Example: **03.05.028.0**

Dimensions

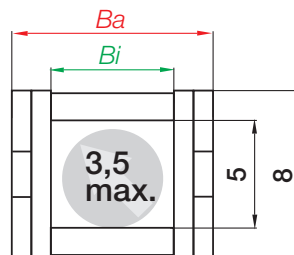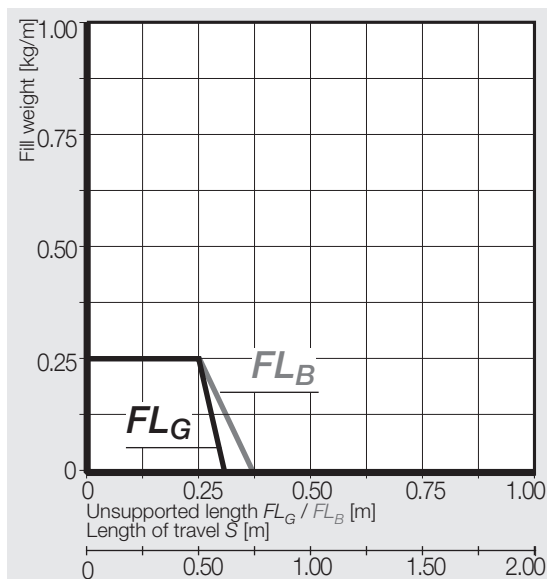


Inner height 5 mm
 Pitch 10 mm/link
 Links/m 100 (1000 mm)
 Chain length $S/2 + K$

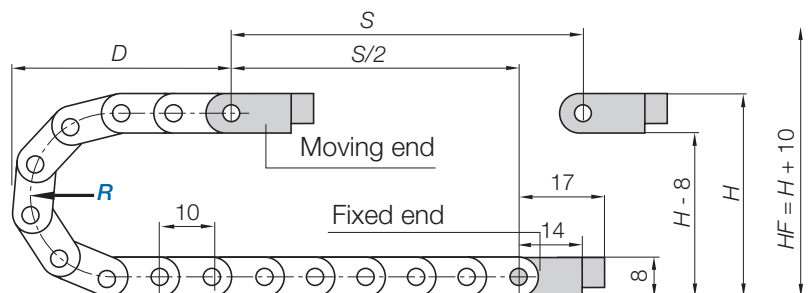


| <i>R</i> | 010 | 012 | 015 | 018 | 028 |
|----------|-----|-----|-----|-----|-----|
| <i>H</i> | 28 | 32 | 38 | 44 | 64 |
| <i>D</i> | 29 | 31 | 34 | 37 | 47 |
| <i>K</i> | 55 | 60 | 70 | 80 | 110 |

The required clearance height: $H_F = H + 10$ mm (with 0,1 kg/m fill weight)

Mounting brackets, polymer one-piece | pivoting

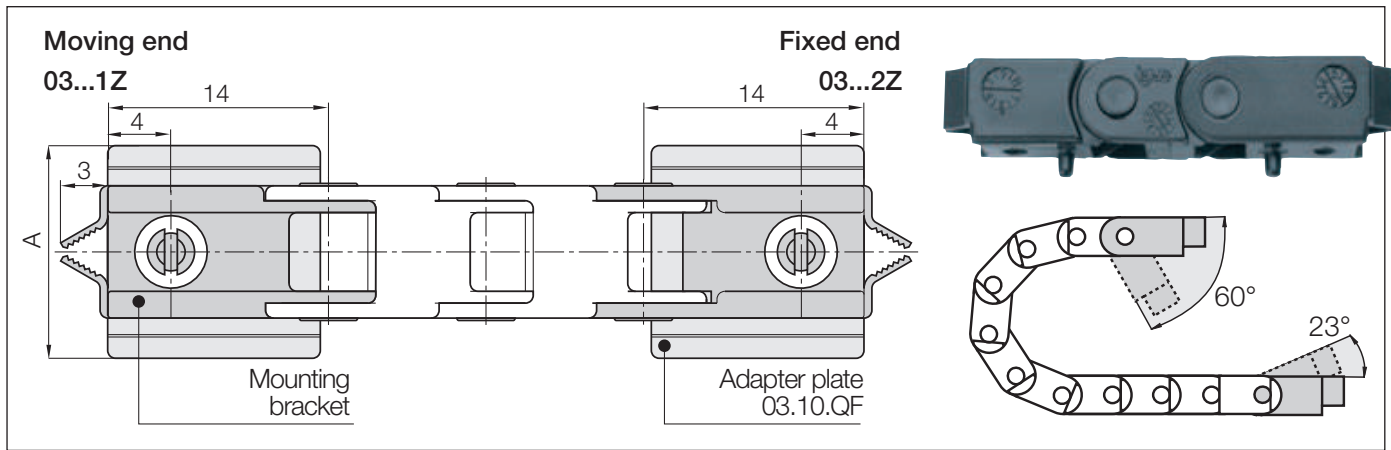


| Width Index | Standard | Part No. full set | Dim. A [mm] |
|-------------|----------|-------------------|-------------|
| .05. | ▶ | 03.05. 12Z | 8,7 |
| .07. | ▶ | 03.07. 12Z | 10,7 |
| .10. | ▶ | 03.10. 12Z | 13,7 |

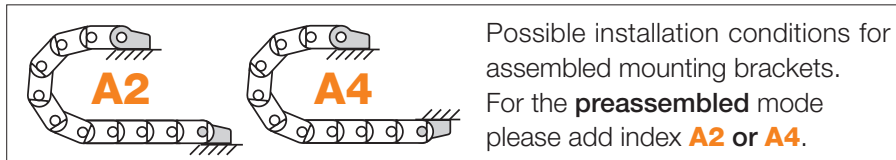


Part No. structure

03.05. 12Z **A2**

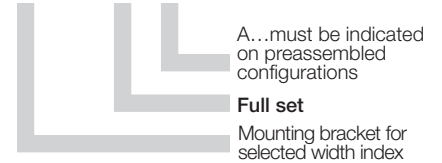

Additional Features

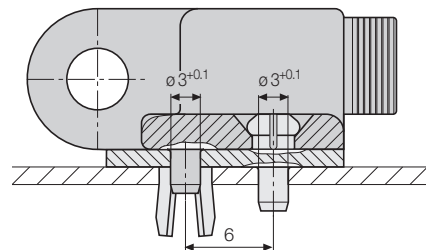

Adapter plate for rapid installation: for all sizes of Part No. 03.10.QF

The adapter has broken edges so that it can be adapted to the respective e-chain® width. It is not absolutely necessary when attaching the mounting brackets. The mounting brackets can also be screwed on without the adapter plate.